

Selection guide **page 3/2**

Complete switches, 10 A

- Front mounting by Ø 16 or Ø 22 mm hole, with 30 x 30 mm front plate . . . *page 3/8*
 - Switches and stepping switches. *page 3/8*
 - Changeover switches. *page 3/10*
 - Voltmeter and ammeter switches *page 3/12*

Complete switches, 12 and 20 A

- Front mounting, "multi-fixing" or by Ø 22 mm hole, with 45 x 45 mm front plate
 - Switches *page 3/20*
 - Stepping switches *page 3/23*
 - Reversing and changeover switches *page 3/29*
 - Ammeter switches *page 3/30*
 - Voltmeter switches *page 3/32*

Adaptable sub-assemblies, 12 and 20 A

- Bodies (contact blocks + fixing plate)
 - Switches *page 3/34*
 - Changeover switches. *page 3/38*
 - Reversing switches *page 3/40*
 - Encoded output switches *page 3/41*
 - Paralleling switches *page 3/44*
 - Stepping switches *pages 3/46 and 3/59*
 - Ammeter switches *page 3/56*
 - Voltmeter switches *page 3/57*
 - Multi-circuit switches *page 3/60*
 - Reversing switches *page 3/61*
 - Star-delta switches and reversing star-delta switches *page 3/62*
 - Pole change switches and reversing pole change switches *page 3/63*
- Operating heads
 - For "multi-fixing" or Ø 22 mm hole, front mounting bodies *page 3/66*
 - For 4 hole, rear mounting bodies *page 3/67*
- Legends
 - For multi-fixing heads. *page 3/68*
 - For Ø 22 mm hole mounting heads with plastic bezel. *page 3/69*
 - For Ø 22 mm hole mounting heads with chromium plated metal bezel *page 3/70*
 - Legend holders for heads. *page 3/71*
 - Separate components and accessories *page 3/72*

Switches, 10 and 16 A, mounted in plastic enclosure

- Emergency stop switches *page 3/78*
- OFF-ON switches *page 3/79*

Control and signalling units Ø 22, Harmony® XB5, plastic

- Complete units and separate heads for:
 - Spring return pushbuttons *page 1/140*
 - Illuminated pushbuttons, spring return:
 - with integral LED *page 1/145*
 - with BA 9s base fitting *page 1/147*
 - Double-headed pushbuttons, spring return *page 1/148*
 - Mushroom head pushbuttons, spring return type or latching type . . *page 1/150*

Complete switches, 12 A with key operated lock

- Front mounting by 6 screws Ø 5.2 mm, with 55 x 100 mm front plate
 - Stepping switches, 2 to 5 step *page 3/80*
 - Start selector switches changeover switches *page 3/84*
 - Changeover switches. *page 3/85*

Complete switches, 32 to 150 A

- With 64 x 64 mm front plate (32 to 63 A ratings) and 88 x 88 mm front plate (115 and 150 A ratings)
 - Switches *page 3/88*
 - Changeover switches. *page 3/89*
 - Star-delta and reversing star-delta switches *page 3/91*
 - Pole change and reversing switches *page 3/92*

Applications	Used in building control panels and consoles, type K cam switches allow control of processes and utilities in industry and buildings and direct control for simple machines.	
Functions		
Off-On/On-Off switches	1 to 4-pole	1 to 6-pole
Stepping switches	2 to 4-position, 1 and 2-pole	2 to 12-position, 1 to 4-pole
Changeover switches	1 to 4-pole	1 to 5-pole
Measurement switches	Voltmeter and ammeter	Voltmeter and ammeter
Reversing switches	–	2 and 3-pole
Reversing star-delta switches	–	–
Pole change switches	–	2 and 3-speed



Conventional rated thermal current (I_{th})	10 A	12 A
Rated insulation voltage (U_i)	440 V	690 V
Electrical operating characteristics	AC-15 - A300 240 V - 3 A	AC-3 - 3-phase 230 V - 1.1 kW - 4.6 A AC-15 230 V - 3 A
Front plate degree of protection	IP 65	IP 40 IP 65 (with seal)
Product composition	Complete switches	Complete switches Adaptable sub-assemblies Special products (please consult your Regional Sales Office)
Compatibility	Ø 16 and Ø 22 control and signalling units	Ø 22 control and signalling units
Fixing	Single Ø 16 or Ø 22 hole	Multi-fixing Single Ø 22 hole
Front mounting	–	Screw fixing, 4 holes on 36 mm centres
Rear mounting		
Front plate dimensions (mm)	30 x 30	45 x 45 60 x 60 (adaptable sub-assemblies)
Operating heads	Black standard handle Metallic legend, black marking	Black and red standard and long handles Key operator Metallic head Metallic legend with black marking or black legend with white marking
Approvals	cULus EN/IEC 60947-3 EN/IEC 60947-5-1	UL-CSA EN/IEC 60947-3 EN/IEC 60947-5-1
Type	Type K10	Type K1/K2
Cam switch model	K10 ●	K1 ●
Pages	3/8 to 3/12	3/20 to 3/73 and 3/80 to 3/85

1 to 6-pole	1 to 6-pole
2 to 12-position, 1 to 4-pole	–
1 to 5-pole	1 to 4-pole
–	–
2 and 3-pole	2 and 3-pole
Star-delta	Star-delta
2 and 3-speed	2-speed



20 A	32 A	50 A	63 A	115 A	150 A
690 V	690 V	690 V	690 V	690 V	690 V
AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase	AC-3 - 3-phase
230 V - 2.2 kW - 8.3 A	230 V - 5.5 kW	230 V - 7.5 kW	230 V - 11 kW	230 V - 15 kW	230 V - 22 kW
AC-15	AC-15	AC-15	–	–	–
230 V - 4 A	230 V - 14 A	230 V - 16 A			
	IP 40				
	Complete switches				
	–				
	By 4 holes on 48 mm centres			By 4 holes on 68 mm centres	
	Screw fixing, 4 holes on 48 mm centres			Screw fixing, 4 holes on 68 mm centres	
	64 x 64			88 x 88	
	Black standard handle				
	Metallic legend, black marking				
	cULus				
	EN/IEC 60947-3				
	Type K30...K150				
K2 ●	K30 ●	K50 ●	K63 ●	K115 ●	K150 ●
3/20 to 3/73	3/88 to 3/92				

Functions		Complete switches 10 A
Switches	with 60° switching angle	See pages
	with 45° switching angle	3/8
	with 90° switching angle	–
	ON-OFF with spring return from 30° to “0” position	–
	OFF-ON with spring return from 30° to “0” position	–
	OFF-ON with spring return from 120° to 90°	–
	OFF-ON with spring return from 30° and from 330° to “0” position	–
	OFF-ON with 45° switching angle	–
	OFF-ON with momentary-contact function	–
	paralleling with “0” position	–
	OFF-ON changeover with spring return from 240° to 270° and from 120° to 90°	–
Stepping switches	single-pole with or without “0” position	3/8, 3/9
	2-pole with or without “0” position	3/9, 3/10
	2 to 5 step, single-pole, with or without “0” position	–
	2 to 5 step, 2-pole, with or without “0” position	–
	2 and 3 step, 3-pole, with or without “0” position	–
	2 to 11 step, single-pole, with “0” position	–
	2 to 12 step, single-pole, without “0” position	–
	2 to 6 step, 2-pole, with or without “0” position	–
	2 to 6 step, 3-pole, with or without “0” position	–
	2 to 5 step, 4-pole, with or without “0” position	–
	2 and 3 step, with “0” position + left-hand position	–
	3 step, without “0” position	–
	4 step, 4-pole, without “0” position	–
	2 step, with “0” position	–
	3 step, 2-pole, with “0” position	–
	5 step, 2-pole, with “0” position	–
Changeover switches	spring return to “0” position	3/10
	with or without “0” position	3/11
	1 to 4-pole with “0” position	–
	1 to 4-pole without “0” position	–
	1-pole, 2-pole, 3-pole with “0” position	–
	star-delta and reversing star-delta	–
	pole change	–
Voltmeter switches	with “0” position	3/12
	without “0” position	–
Ammeter switches	with “0” position	3/12
	without “0” position	–
Selector switches	BCD encoded output, with “0” position	–
	BCD encoded output, without “0” position	–
	multi-circuit	–
	star-delta and reversing star-delta	–
Reversing switches	with “0” position	–
	with spring return from 330° and from 30° to “0” position	–
	with spring return from 315° and from 45° to “0” position	–
	with spring return from 240° to 270° and from 120° to 90°	–
	with momentary-contact function	–
Pole change switches	for 2-speed motors	–
	for 3-speed motors	–
Start selector switches	3-position with “0” position	–
	4-position with “0” position	–
Starting switches	star-delta and reversing star-delta	–
	pole change	–

	Complete switches 12 and 20 A	Complete switches 12 A, with key operated lock	Adaptable sub-assemblies 12 and 20 A	Complete switches 32 to 150 A
	See pages	See pages	See pages	See pages
	–	–	–	3/88
	3/20	–	3/34	–
	3/20	–	3/35	3/89
	3/21	–	3/36	–
	3/21	–	3/36	–
	3/22	–	3/36	–
	3/22	–	3/37	–
	–	–	3/36	–
	–	–	3/37	–
	–	–	3/44, 3/45	–
	–	–	3/37	–
	–	–	–	–
	–	–	–	–
	3/23, 3/24	–	–	–
	3/25, 3/26	–	–	–
	3/27, 3/28	–	–	–
	–	–	3/46, 3/47,	–
	–	–	3/48, 3/49	–
	–	–	3/50, 3/51	–
	–	–	3/52, 3/53	–
	–	–	3/54, 3/55	–
	–	–	3/59	–
	–	3/80	–	–
	–	3/81	–	–
	–	3/82	–	–
	–	3/83	–	–
	–	3/83	–	–
	–	–	–	–
	–	–	3/38, 3/39	3/90
	3/29	–	–	–
	3/29	–	–	–
	–	3/85	–	–
	–	–	3/62, 3/63	3/91
	–	–	3/64	–
	3/32, 3/33	–	3/57, 3/58	–
	3/32, 3/33	–	3/57, 3/58	–
	3/30, 3/31	–	3/56	–
	3/30, 3/31	–	3/56	–
	–	–	3/41, 3/42	–
	–	–	3/42, 3/43	–
	–	–	3/60	–
	–	–	3/62	–
	–	–	3/40, 3/61	3/92
	–	–	3/61	–
	3/29	–	3/40	–
	–	–	3/40	–
	–	–	3/40	–
	–	–	3/63, 3/64	3/92
	–	–	3/65	–
	–	3/84	–	–
	–	3/85	–	–
	–	–	–	3/91
	–	–	–	3/92

Cam switches

Complete switches, 10 A


The range of K10 cam switches (10 A rating) comprises only complete switches. These products are more specifically designed for process control applications:

- compact size,
- easy to integrate with other Ø 16 and Ø 22 mm units,
- selection functions.

Complete switches

- switches
- stepping switches
- reversing switch
- changeover switches
- voltmeter switches
- ammeter switches


Front mounting

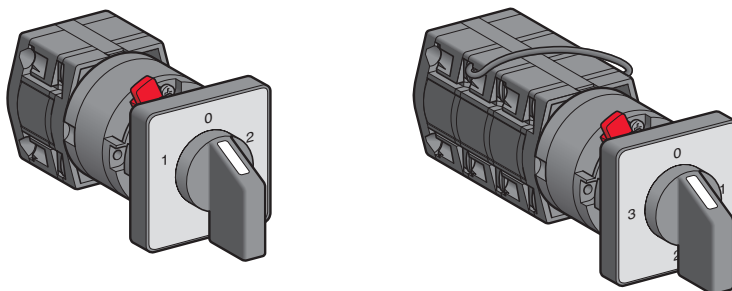

By Ø 16.3 or Ø 22.3 mm hole


Mounting

Ø 16 or Ø 22 hole fixing

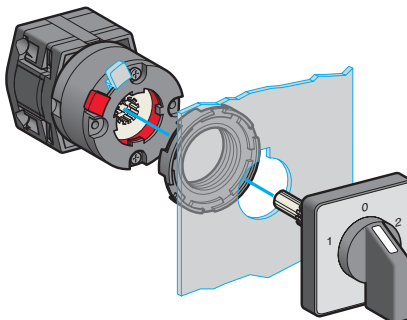


Locking/unlocking of the body-head assembly by spigot

Ø 16 hole fixing

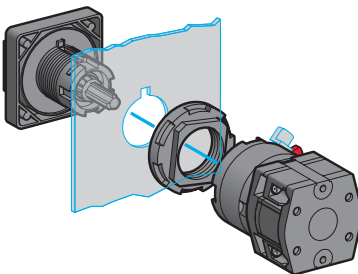

Ø 22 hole fixing

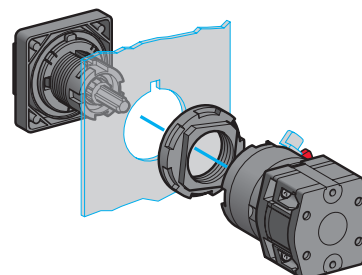

Cam switches

Complete switches, 10 A

Front mounting by Ø 16 or Ø 22 mm hole

With 30 x 30 mm front plate

Environment

Conformity to standards	EN/IEC 60947-3 EN/IEC 60947-5-1 UL 508
Product certifications	cULus
Protective treatment	Standard version: "TC"
Ambient air temperature	For operation: - 20...+ 55 °C For storage: - 40...+ 70 °C
Electric shock protection	Class II, conforming to IEC 61140
Degree of protection	IP 65 conforming to IEC 60529 (operating head) IP 20 (contact block)
Mechanical life	1 million operating cycles

Contact block characteristics

Rated operational characteristics	AC-15, A300	—	240 V	3 A
			120 V	6 A
	AC-21A, AC-1	—	400 V	10 A
	UL/Canada Heavy Duty A300	3-phase	110/120 V	0.75 hp
			220/240 V	1 hp
		single-phase	110/120 V	0.33 hp
			220/240 V	0.75 hp
	AC-23A	3-phase	220/240 V	1.8 kW
		single-phase	110/120 V	0.37 kW
			220/240 V	0.75 kW
d.c. current le resistive load	1 contact	24 V	10 A	
		110 V	0.7 A	
		220 V	0.3 A	
Short-circuit protection	10 A cartridge fuse type gG			
Conventional thermal current (I _{th})	10 A			
Rated insulation voltage (U _i)	440 V, degree of pollution 3, conforming to IEC 60947-1			
Contact operation	Slow break			
Terminal referencing	Conforming to EN 50013			
Rated impulse withstand voltage (U _{imp})	4 kV conforming to IEC 60947-1			
Electrical reliability	Failure rate < 1 fault for 100 million operating cycles (≡ 24 V PLC inputs)			
Connection	Captive screw clamp terminals Clamping capacity: 2 x 1.5 mm ²			

Cam switches

Complete switches, 10 A
Front mounting by Ø 16 or Ø 22 mm hole
With 30 x 30 mm front plate



K10 B002ACH

Switches with 60° switching angle				
Wiring diagram and switching programme	Marking and switch position	Number of poles	Reference	Weight kg
		1	K10 A001ACH	0.030
		2	K10 B002ACH	0.035
		3	K10 C003ACH	0.045
		4	K10 D004ACH	0.045

Stepping switches, single-pole, with "0" position				
Wiring diagram and switching programme	Marking and switch position	Number of steps	Reference	Weight kg
		2 + "0" position	K10 B002QCH	0.035
		3 + "0" position	K10 C003QCH	0.045
		4 + "0" position	K10 D004QCH	0.045



K10 D004QCH

Cam switches

Complete switches, 10 A

Front mounting by Ø 16 or Ø 22 mm hole

With 30 x 30 mm front plate



K10 D012QCH

Stepping switches, 2-pole, with "0" position

Wiring diagram and switching programme	Marking and switch position	Number of steps	Reference	Weight kg
		2 + "0" position	K10 D012QCH	0.045
		3 + "0" position	K10 F013QCH	0.055




Stepping switches, single-pole, without "0" position

		3	K10 C003NCH	0.045
		4	K10 D004NCH	0.045




Cam switches
Complete switches, 10 A
Front mounting by Ø 16 or Ø 22 mm hole
With 30 x 30 mm front plate

3

Stepping switches, 2-pole, without “0” position

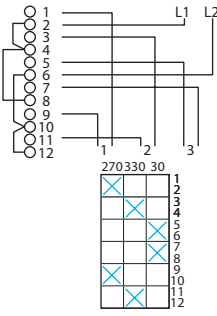Wiring diagram and switching programme	Marking and switch position	Number of steps	Reference	Weight kg
	 	3	K10 F013NCH	0.055

Changeover switch with spring return to “0” position

Wiring diagram and switching programme	Marking and switch position	Number of poles	Reference	Weight kg
	 	1	K10 B006TCH	0.035



K10 B006TCH

Cam switches

Complete switches, 10 A

Front mounting by Ø 16 or Ø 22 mm hole

With 30 x 30 mm front plate



K10 F003UCH

Changeover switches with "0" position

Wiring diagram and switching programme	Marking and switch position	Number of poles	Reference	Weight kg
		1	K10 B001UCH	0.035
		2	K10 D002UCH	0.045
		3	K10 F003UCH	0.055
		4	K10 H004UCH	0.065

Changeover switches without "0" position

		1	K10 B011UCH	0.035
		2	K10 D012UCH	0.045
		3	K10 F013UCH	0.055
		4	K10 H014UCH	0.065

Cam switches
Complete switches, 10 A
Front mounting by Ø 16 or Ø 22 mm hole
With 30 x 30 mm front plate



K10 F027MCH

3

Voltmeter switches

For measurements between 3 phases and between 1 phase and neutral

Wiring diagram and switching programme	Marking and switch position	Reference	Weight kg
		K10 F027MCH	0.055

For measurements between 3 phases, with “0” position

		K10 D024MCH	0.045

Ammeter switches


For 3 circuits, with “0” position

		K10 F003MCH	0.055



K10 F003MCH


Cam switches, 10 A

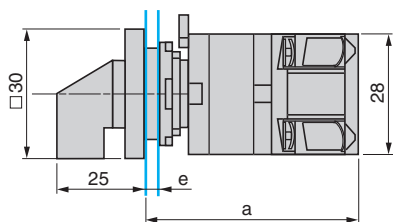

	a
K10 A, B	51
K10 C, D	63
K10 F	75
K10 H	87


e: support panel thickness 0.5 to 5 mm.

Ø 16 and Ø 22 mm panel cut-outs

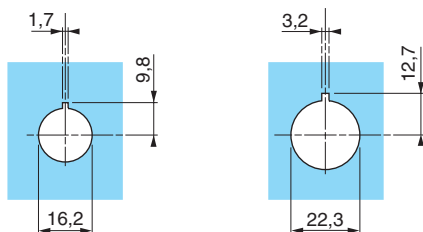

Convention used for switching programme representation

Link positions (factory mounted)



Graphic representation of switching positions and spring return to "0" position



Contact closed



Contact closed in 2 positions and maintained between the 2 positions




Sealed assembly for auto-maintain control



Overlapping contacts

Angular position of switch



Cam switches


Complete switches and adaptable sub-assemblies, 12 and 20 A

The cam switch range comprises the equally dimensioned and similar looking products of the K1 (12 A rating) series and K2 (20 A rating) series. Both series feature complete switches and adaptable sub-assemblies for user assembly.

Complete switches


Front mounting

- switches
- stepping switches (2 to 5 step)
- reversing and 1 to 4-pole changeover switches
- ammeter and voltmeter switches

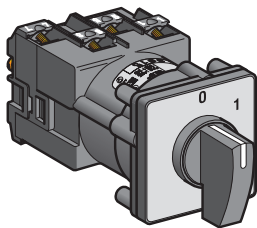


"Multi-fixing"

K1●●●●●H, K2●●●●●H
See pages 3/20 to 3/27

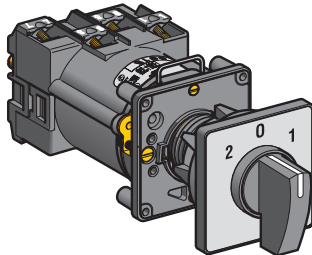

By Ø 22 mm hole

K1●●●●●H, K2●●●●●H
See pages 3/20 to 3/27

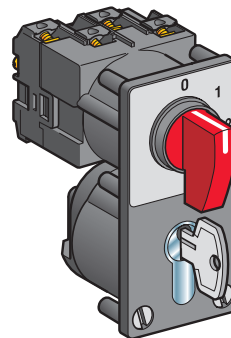


Front mounting by 6 screws
Ø 5.2 mm and 55 x 100 mm
front plate

K1●●●●●Z●
See pages 3/80 to 3/85

Switches for user assembly

Front mounting

Body sub-assembly

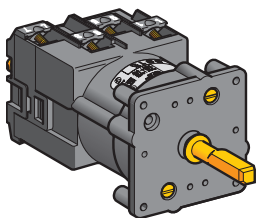

"Multi-fixing"

K1●●●●●L, K2●●●●●LL
See pages 3/34 to 3/65

Head sub-assembly

- With 45 x 45 mm front plate and 35 mm handle




With blank legend

K●G 3H
See page 3/66



With marked legend

KCG 3H
See page 3/66




Without legend

KDG 3H
See page 3/66


Head sub-assembly

- With 45 x 45 mm front plate, 35 mm handle and padlocking device



With marked legend

KCG 3Y
See page 3/66



Without legend

KDG 3Y
See page 3/66


Cam switches

Complete switches and adaptable sub-assemblies, 12 and 20 A

Switches for user assembly (continued)

Front mounting (continued)

Body sub-assembly




With Ø 22 mm hole

K1●●●●●, K2●●●●●L

See pages 3/34 to 3/65

Head sub-assembly


■ With 45 x 45 mm front plate and 35 mm handle



With blank legend

K●C 1H


See page 3/66



With marked legend (1)

K●C 1●●

See page 3/66




Without legend

KDC 1●●

See page 3/66

Head sub-assembly


■ With 45 x 45 mm front plate and key operator



With blank legend

K●C 1●

See page 3/66




Without legend

KDC 1●

See page 3/66

Head sub-assembly


■ With 60 x 60 mm front plate and 42 mm handle



With blank legend

K●D 1H


See page 3/66



With marked legend

KCD 1●●

See page 3/66




Without legend

KDD 1H

See page 3/66

Head sub-assembly


■ With 60 x 60 mm front plate and key operator



With blank legend

K●D 1●

See page 3/67



Without legend

KDD 1●

See page 3/67

Head sub-assembly

■ Circular with plastic bezel



Key operator

K●A 1●

See page 3/67



35 mm handle

K●A 1H

See page 3/67

(1) With or without padlocking device.


Cam switches

Complete switches and adaptable sub-assemblies, 12 and 20 A

Switches for user assembly (continued)

Front mounting (continued)

Body sub-assembly

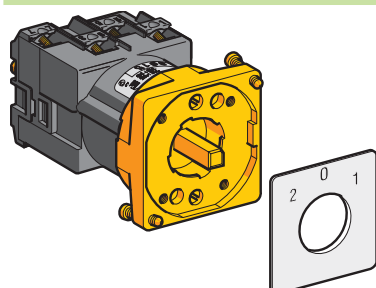

With Ø 22 mm hole and metal mounting plate

K1●●●●●K, K2●●●●●X

See pages 3/34 to 3/65

Head sub-assembly

■ Circular with metal bezel



Standard handle

KAX Z1M1●


See page 3/67



Long handle

KAX Z1C1●

See page 3/67




Key operator

KAX Z1S1●●

See page 3/67

Rear mounting


Body sub-assembly

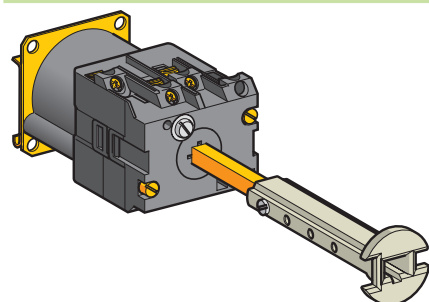

With 4 holes

K1●●●●●, K2●●●●●


See pages 3/34 to 3/65



With blank legend

K●E 1H


See page 3/67



With marked legend (1)

KCE 1●

See page 3/67




Without legend

KDE 1●

See page 3/67

Head sub-assembly


■ With 60 x 60 mm front plate and 42 mm handle



With blank legend

K●F 1H


See page 3/67



With marked legend

KCF 1MH

See page 3/67



Without legend

KDF 1H

See page 3/67

(1) With or without padlocking device.

Accessories

Various accessories complement the K1 - K2 cam switch range: legends, legend holders, terminal covers, seals, etc. See pages 3/68 to 3/73.

Switches with specific schemes



If you cannot find a standard switching programme listed in this catalogue to suit your application, please consult your Regional Sales Office.

The cam switches are available to suit various mounting and fixing methods.

Fixing

Front mounting


By means of "multi-fixing" front plate, using 2 or 4 screws

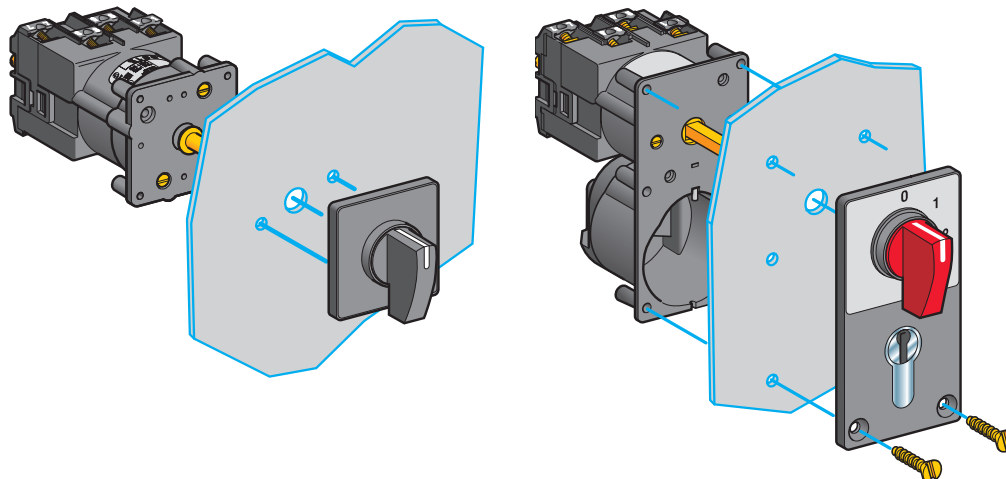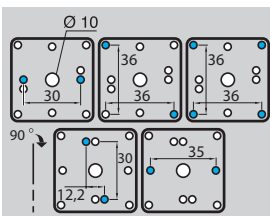


The "multi-fixing" concept enables the switch to be panel mounted using the most commonly used fixing centre dimensions. See drawing to left.

Fixing by 6 screws Ø 5.2 mm and 55 x 100 mm front plate.

By means of single Ø 22 mm hole

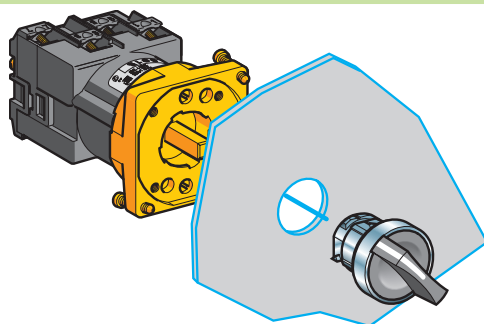


Ø 22.5 mm cut-out.
Head attaches to plate using 1/4 turn bayonet locking and secured on panel by 2 needle screws.

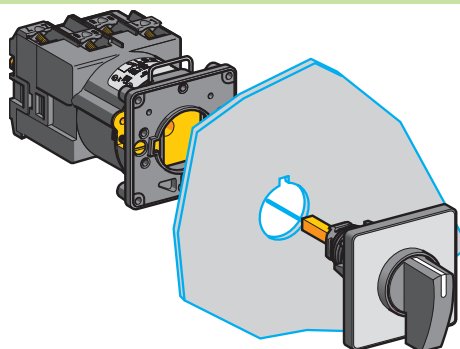

Ø 22.5 mm cut-out with anti-rotation notch.
Head clips into body and secured on panel by fixing nut.

Rear mounting

By means of 4 holes

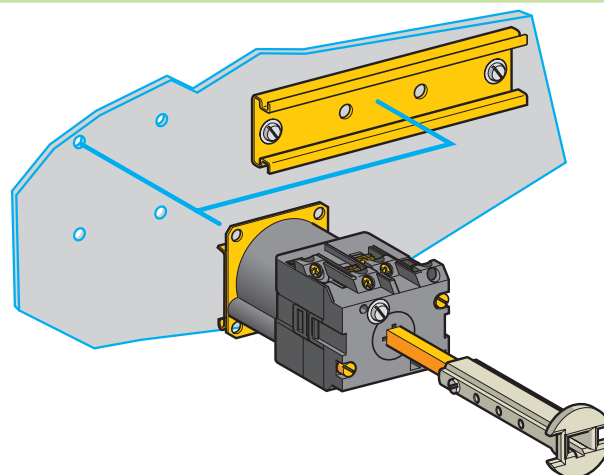

Switch can be directly mounted on backplate using 4 screws.
For DIN rail mounting, an adaptor is available as an accessory. See page 3/75.

Characteristics					
Environment					
Cam switch type			K 1		K 2
Conformity to standards	For control circuits		EN/IEC 60947-5-1 UL 508 CSA C22-2 n° 14		
	For power circuits		IEC/EN 60947-3 UL 508 CSA C22-2 n° 14		
Product certifications	UL, CSA A300/Q300 with “isolation” function CCC, GOST		240 V 0.33 hp single-phase	240 V 1 hp 3-phase	240 V 1 hp single-phase
	Marine classification: GL, LROS, RMRS		2-pole		2-pole
Protective treatment	Standard version		“TC”		
Ambient air temperature around the device	For operation	°C	- 25...+ 55		
	For storage	°C	- 40...+ 70		
Shock resistance	Conforming to IEC 60068-2-27		30 gn		
Vibration resistance	Conforming to IEC 60068-2-6		5 gn, 10...150 Hz		
Electric shock protection	Conforming to IEC 61140		Class II		
Degree of protection	Conforming to IEC 60529		IP 40, for fixing by front plate and 4 screws IP 65, with additional seal		
			IP 65, for Ø 22 mm hole fixing IP 20 (contact block)		
Mechanical life	Operating cycles		1 million		

Characteristics (continued)					
Contact blocks					
Cam switch type				K 1	K 2
Rated insulation voltage (Ui)	Conforming to IEC 60947-1 degree of pollution 3		V	690	690
Conventional thermal current	Screw clamp terminal connections	In open air (Ith)	A	12	20
		In enclosure (Ithe)	A	10	16
Rated operational characteristics	~ AC-15			Conforming to IEC 60947-5-1	
				230 V/3 A	
				400 V/2 A	
				500 V/1 A	
	~ AC-3	3-phase		Conforming to IEC 60947-3	
				230 V/1.1 kW/4.6 A	
				400 V/1.5 kW/3.3 A	
				500 V/1.5 kW/2.8 A	
		690 V/1.5 kW/1.8 A			
		single-phase 2-pole		230 V/0.6 kW	
				400 V/1.5 kW	
		~ AC-23 A	3-phase		230 V/1.5 kW/5.6 A
	400 V/2.2 kW/4.8 A				
	500 V/2.2 kW/3.8 A				
	690 V/2.2 kW/2.8 A				
	~ AC-21	3-phase		230 V/4.8 kW	
				400 V/8.3 kW	
				500 - 660 V/10.5 kW	
Electrical durability (millions of operating cycles)	AC-3 and AC 23			0.5	0.2
	AC-15 and AC -21			1	0.6
Operating rate (operating cycles/h)	AC-3, AC-23 and AC-21			150	150
	AC-15			500	500
Rated conditional short-circuit current			kA	10	10
Short-circuit protection	Cartridge fuse			16 A gG	20 A gG
Rated impulse withstand voltage	Conforming to IEC 60947-1 (Uimp)		kV	6	
	In “isolating” function (Uimp)		kV	4	
Contact operation				Slow break with positive opening operation	
Terminal referencing				Conforming to EN 50013	
Connection	Captive screw clamp terminals		mm²	Solid cable, 1 x 2.5	
				Flexible cable, 1 x 2.5 or 2 x 1.5: with or without cable end	





Cam switches

Complete switches, 12 and 20 A





Front mounting, "multi-fixing" or by Ø 22 mm hole

With 45 x 45 mm front plate, 35 mm handle and metallic legend with black marking

Switches with 45° switching angle

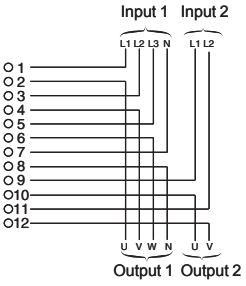Wiring diagram and switching programme	Marking and switch position	Front mounting method	Number of poles	Thermal current (Ith)	Reference	Weight
				A		kg
		"Multi-fixing"	1	12	K1A 001ALH	0.103
				20	K2A 001ALH	0.103
			2	12	K1B 002ALH	0.113
				20	K2B 002ALH	0.113
			3	12	K1C 003ALH	0.133
				20	K2C 003ALH	0.133
			4	12	K1D 004ALH	0.138
				20	K2D 004ALH	0.138
			5	12	K1E 005ALH	0.158
				20	K2E 005ALH	0.158
			6	12	K1F 006ALH	0.168
				20	K2F 006ALH	0.168
		By Ø 22 mm hole	1	12	K1A 001ACH	0.123
				20	K2A 001ACH	0.123
			2	12	K1B 002ACH	0.133
				20	K2B 002ACH	0.133
			3	12	K1C 003ACH	0.153
				20	K2C 003ACH	0.153
			4	12	K1D 004ACH	0.158
				20	K2D 004ACH	0.158
			5	12	K1E 005ACH	0.178
				20	K2E 005ACH	0.178
			6	12	K1F 006ACH	0.188
				20	K2F 006ACH	0.188

Switches with 90° switching angle

Wiring diagram and switching programme	Marking and switch position	Front mounting method	Number of poles	Thermal current (Ith)	Reference	Weight
				A		kg
		"Multi-fixing"	2	12	K1B 1002HLH	0.130
				20	K2B 1002HLH	0.130
			3	12	K1C 003HLH	0.135
				20	K2C 003HLH	0.135
			4	12	K1D 004HLH	0.140
				20	K2D 004HLH	0.140
			2	12	K1B 1002HCH	0.150
				20	K2B 1002HCH	0.150
		By Ø 22 mm hole	3	12	K1C 003HCH	0.155
				20	K2C 003HCH	0.155
			4	12	K1D 004HCH	0.160
				20	K2D 004HCH	0.160


Cam switches

Complete switches, 12 and 20 A
Front mounting, “multi-fixing” or by Ø 22 mm hole
With 45 x 45 mm front plate, 35 mm handle and metallic
legend with black marking

3



ON-OFF switches with spring return from 30° to “0” position						
Wiring diagram and switching programme	Marking and switch position	Front mounting method	Number of poles	Thermal current (Ith)	Reference	Weight
		“Multi-fixing”	1	12	K1A 002TLH	0.105
				20	K2A 002TLH	0.105
		By Ø 22 mm hole	1	12	K1A 002TCH	0.125
				20	K2A 002TCH	0.125




OFF-ON switches with spring return from 30° to “0” position						
Wiring diagram and switching programme	Marking and switch position	Front mounting method	Number of poles	Thermal current (Ith)	Reference	Weight
		“Multi-fixing”	1	12	K1A 001TLH	0.105
				20	K2A 001TLH	0.105
		By Ø 22 mm hole	1	12	K1A 001TCH	0.125
				20	K2A 001TCH	0.125

Cam switches

Complete switches, 12 and 20 A
Front mounting, “multi-fixing” or by Ø 22 mm hole
With 45 x 45 mm front plate, 35 mm handle and metallic
legend with black marking

OFF-ON switches with spring return from 120° to 90°



Wiring diagram and switching programme	Marking and switch position	Front mounting method	Number of poles	Thermal current (Ith)	Reference	Weight
				A		kg

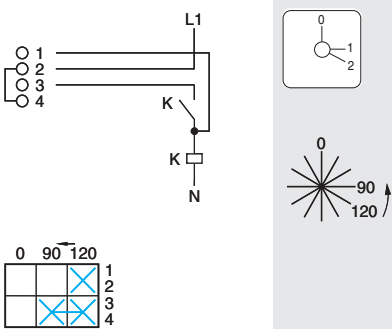

“Multi-fixing”	1	12	K1B 003TLH	0.115
		20	K2B 003TLH	0.115
By Ø 22 mm hole	1	12	K1B 003TCH	0.135
		20	K2B 003TCH	0.135

3

OFF-ON switches with spring return from 30° and from 330° to “0” position

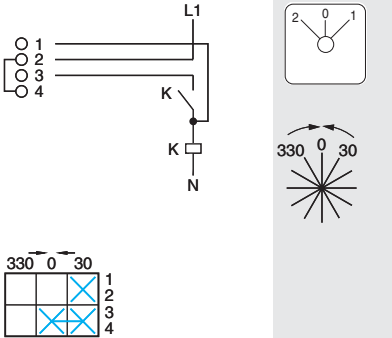

“Multi-fixing”	1	12	K1B 004TLH	0.115
		20	K2B 004TLH	0.115
By Ø 22 mm hole	1	12	K1B 004TCH	0.135
		20	K2B 004TCH	0.135

Cam switches

Complete switches, 12 and 20 A


Front mounting, "multi-fixing" or by Ø 22 mm hole

With 45 x 45 mm front plate, 35 mm handle and metallic legend with black marking

Stepping switches (2 to 5 step), single-pole, with "0" position



K●●●●●LH

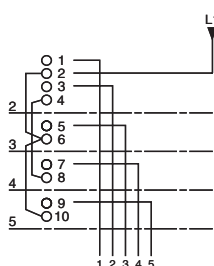

"Multi-fixing"

2 step + "0"

12 K1B 002QLH 0.115

20 K2B 002QLH 0.115


By Ø 22 mm hole

12 K1B 002QCH 0.135

20 K2B 002QCH 0.135



K●●●●●CH



"Multi-fixing"

3 step + "0"

12 K1C 003QLH 0.135

20 K2C 003QLH 0.135

By Ø 22 mm hole

12 K1C 003QCH 0.155

20 K2C 003QCH 0.155



"Multi-fixing"

4 step + "0"

12 K1D 004QLH 0.140

20 K2D 004QLH 0.140

By Ø 22 mm hole

12 K1D 004QCH 0.160

20 K2D 004QCH 0.160



"Multi-fixing"

5 step + "0"

12 K1E 005QLH 0.160

20 K2E 005QLH 0.160

By Ø 22 mm hole

12 K1E 005QCH 0.180

20 K2E 005QCH 0.180

Cam switches


Complete switches, 12 and 20 A
Front mounting, “multi-fixing” or by Ø 22 mm hole
With 45 x 45 mm front plate, 35 mm handle and metallic
legend with black marking

Stepping switches (2 to 5 step), single-pole, without “0” position

Wiring diagram and switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
			A		kg




K...LH

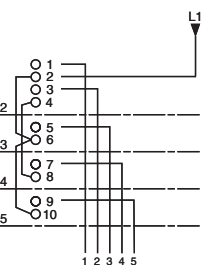

“Multi-fixing”	2 step		
	12	K1B 002NLH	0.115
	20	K2B 002NLH	0.115
By Ø 22 mm hole	12	K1B 002NCH	0.135
	20	K2B 002NCH	0.135



K...CH



“Multi-fixing”	3 step		
	12	K1C 003NLH	0.135
	20	K2C 003NLH	0.135
By Ø 22 mm hole	12	K1C 003NCH	0.155
	20	K2C 003NCH	0.155



“Multi-fixing”	4 step		
	12	K1D 004NLH	0.140
	20	K2D 004NLH	0.140
By Ø 22 mm hole	12	K1D 004NCH	0.160
	20	K2D 004NCH	0.160



“Multi-fixing”	5 step		
	12	K1E 005NLH	0.160
	20	K2E 005NLH	0.160
By Ø 22 mm hole	12	K1E 005NCH	0.180
	20	K2E 005NCH	0.180

Cam switches

Complete switches, 12 and 20 A


Front mounting, "multi-fixing" or by Ø 22 mm hole

With 45 x 45 mm front plate, 35 mm handle and metallic legend with black marking

Stepping switches (2 to 5 step), 2-pole, with "0" position



K●●●●●LH

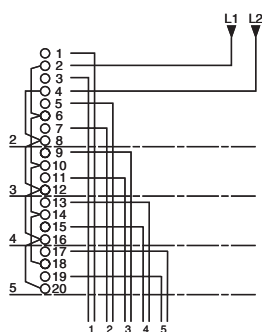

"Multi-fixing"


By Ø 22 mm hole

2 step + "0"

Thermal current (Ith)	Reference	Weight
12	K1D 012QLH	0.140
20	K2D 012QLH	0.140
12	K1D 012QCH	0.160
20	K2D 012QCH	0.160



K●●●●●CH

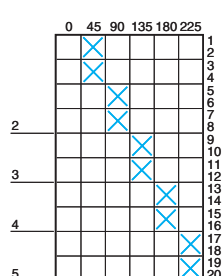

"Multi-fixing"

By Ø 22 mm hole

3 step + "0"

Thermal current (Ith)	Reference	Weight
12	K1F 013QLH	0.170
20	K2F 013QLH	0.170
12	K1F 013QCH	0.190
20	K2F 013QCH	0.190



"Multi-fixing"

By Ø 22 mm hole

4 step + "0"

Thermal current (Ith)	Reference	Weight
12	K1H 014QLH	0.195
20	K2H 014QLH	0.195
12	K1H 014QCH	0.215
20	K2H 014QCH	0.215



"Multi-fixing"

By Ø 22 mm hole



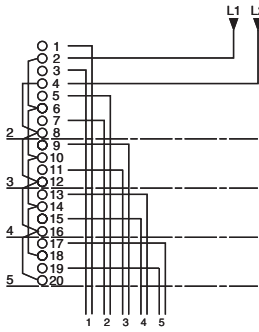
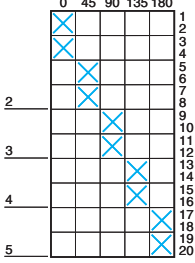


5 step + "0"

Thermal current (Ith)	Reference	Weight
12	K1K 015QLH	0.225
20	K2K 015QLH	0.225
12	K1K 015QCH	0.245
20	K2K 015QCH	0.245

Cam switches

Complete switches, 12 and 20 A
Front mounting, “multi-fixing” or by Ø 22 mm hole
With 45 x 45 mm front plate, 35 mm handle and metallic
legend with black marking









Stepping switches (2 to 5 step), 2-pole, without “0” position

Wiring diagram and switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
			A		kg
<div> K...LH</div> <div> K...CH</div>	 	 	2 step		
			12	K1D 012NLH	0.140
			20	K2D 012NLH	0.140
			12	K1D 012NCH	0.160
			20	K2D 012NCH	0.160
			3 step		
			12	K1F 013NLH	0.170
			20	K2F 013NLH	0.170
			12	K1F 013NCH	0.190
			20	K2F 013NCH	0.190
			4 step		
			12	K1H 014NLH	0.195
			20	K2H 014NLH	0.195
			12	K1H 014NCH	0.215
			20	K2H 014NCH	0.215
			5 step		
			12	K1K 015NLH	0.225
			20	K2K 015NLH	0.225
			12	K1K 015NCH	0.245
			20	K2K 015NCH	0.245

Cam switches

Complete switches, 12 and 20 A
Front mounting, “multi-fixing” or by Ø 22 mm hole
With 45 x 45 mm front plate, 35 mm handle and metallic
legend with black marking









Stepping switches (2 and 3 step), 3-pole, with “0” position

Wiring diagram and switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
			A		kg
 K●●●●●LH	 		2 step + “0”		
			12	K1F 022QLH	0.170
			20	K2F 022QLH	0.170
			12	K1F 022QCH	0.190
			20	K2F 022QCH	0.190
 K●●●●●CH	 		3 step + “0”		
			12	K1I 023QLH	0.215
			20	K2I 023QLH	0.215
			12	K1I 023QCH	0.235
			20	K2I 023QCH	0.235

Cam switches

Complete switches, 12 and 20 A
Front mounting, “multi-fixing” or by Ø 22 mm hole
With 45 x 45 mm front plate, 35 mm handle and metallic
legend with black marking

Stepping switches (2 and 3 step), 3-pole, without “0” position

Wiring diagram and switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
			A		kg
 K●●●●●LH	 	 By Ø 22 mm hole	2 step		
			12	K1F 022NLH	0.170
			20	K2F 022NLH	0.170
			12	K1F 022NCH	0.190
			20	K2F 022NCH	0.190
 K●●●●●CH	 	 By Ø 22 mm hole	3 step		
			12	K1I 023NLH	0.215
			20	K2I 023NLH	0.215
			12	K1I 023NCH	0.235
			20	K2I 023NCH	0.235

Cam switches


Complete switches, 12 and 20 A

Front mounting, "multi-fixing" or by Ø 22 mm hole

With 45 x 45 mm front plate, 35 mm handle and metallic legend with black marking




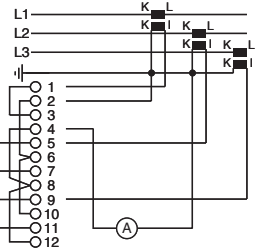




Reversing switches with spring return from 315° and from 45° to "0" position						
Wiring diagram and switching programme	Marking and switch position	Front mounting method	Number of poles	Thermal current (Ith)	Reference	Weight
				A		kg
		"Multi-fixing"	1	12	K1B 006TLH	0.115
				20	K2B 006TLH	0.115
			By Ø 22 mm hole	12	K1B 006TCH	0.135
				20	K2B 006TCH	0.135



Changeover switches, 1 to 4-pole						
Wiring diagram and switching programme	Marking and switch position	Front mounting method	Number of poles	Thermal current (Ith)	Reference	Weight
				A		kg
		"Multi-fixing"	With "0" position			
			1	12	K1B 001ULH	0.115
				20	K2B 001ULH	0.115
			2	12	K1D 002ULH	0.140
				20	K2D 002ULH	0.140
			3	12	K1F 003ULH	0.170
				20	K2F 003ULH	0.170
			4	12	K1H 004ULH	0.195
				20	K2H 004ULH	0.195
			By Ø 22 mm hole	12	K1B 001UCH	0.135
				20	K2B 001UCH	0.135
				12	K1D 002UCH	0.160
				20	K2D 002UCH	0.160
				12	K1F 003UCH	0.190
				20	K2F 003UCH	0.190
				12	K1H 004UCH	0.215
				20	K2H 004UCH	0.215
		"Multi-fixing"	Without "0" position			
			1	12	K1B 011ULH	0.115
				20	K2B 011ULH	0.115
			2	12	K1D 012ULH	0.140
				20	K2D 012ULH	0.140
			3	12	K1F 013ULH	0.170
				20	K2F 013ULH	0.170
			4	12	K1H 014ULH	0.195
				20	K2H 014ULH	0.195
			By Ø 22 mm hole	12	K1B 011UCH	0.135
				20	K2B 011UCH	0.135
				12	K1D 012UCH	0.160
				20	K2D 012UCH	0.160
				12	K1F 013UCH	0.190
				20	K2F 013UCH	0.190
				12	K1H 014UCH	0.215
				20	K2H 014UCH	0.215

Cam switches

Complete switches, 12 A
Front mounting, “multi-fixing” or by Ø 22 mm hole
With 45 x 45 mm front plate, 35 mm handle and metallic
legend with black marking

Ammeter switches					
Wiring diagram and switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
			A		kg
For 3 circuits					
 K●●●●●LH	 		With “0” position		
			“Multi-fixing”	12	K1F 003MLH0.170
			By Ø 22 mm hole	12	K1F 003MCH0.190
 K●●●●●CH	 		Without “0” position		
			“Multi-fixing”	12	K1F 013MLH0.170
			By Ø 22 mm hole	12	K1F 013MCH0.190

Cam switches

Complete switches, 12 A

Front mounting, “multi-fixing” or by Ø 22 mm hole

With 45 x 45 mm front plate, 35 mm handle and metallic legend with black marking


Ammeter switches (continued)

Wiring diagram and switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
			A		kg

For 4 circuits






K●●●●●LH

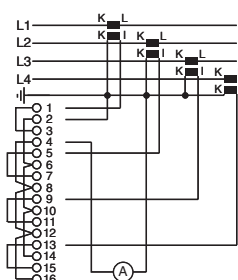


	With “0” position		
“Multi-fixing”	12	K1H 004MLH	0.195
By Ø 22 mm hole	12	K1H 004MCH	0.215



K●●●●●CH

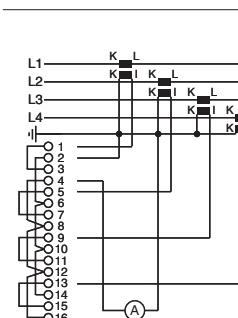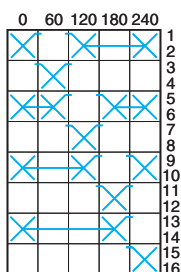

	Without “0” position		
“Multi-fixing”	12	K1H 014MLH	0.195
By Ø 22 mm hole	12	K1H 014MCH	0.215



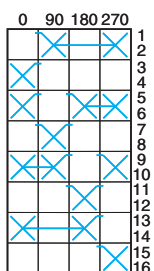



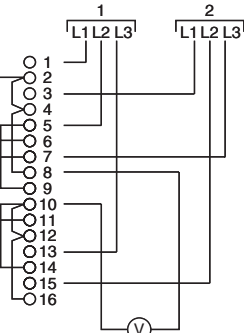
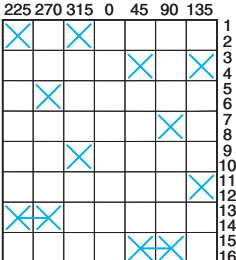


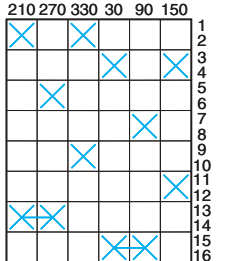



Cam switches

Complete switches, 12 A

Front mounting, “multi-fixing” or by Ø 22 mm hole

With 45 x 45 mm front plate, 35 mm handle and metallic legend with black marking

Voltmeter switches						
Wiring diagram	Switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
				A		kg
For measurements between 3 phases and neutral						
			With "0" position			
			"Multi-fixing"	12	K1D 023MLH	0.140
			By Ø 22 mm hole	12	K1D 023MCH	0.160
			Without "0" position			
			Without "0" position			
			"Multi-fixing"	12	K1D 033MLH	0.140
			By Ø 22 mm hole	12	K1D 033MCH	0.160
For measurements between 3 phases of 2 supplies						
			With "0" position			
			"Multi-fixing"	12	K1H 026MLH	0.205
			By Ø 22 mm hole	12	K1H 026MCH	0.215
			Without "0" position			
			Without "0" position			
			"Multi-fixing"	12	K1H 036MLH	0.205
			By Ø 22 mm hole	12	K1H 036MCH	0.215

Cam switches

Complete switches, 12 A




Front mounting, "multi-fixing" or by Ø 22 mm hole

With 45 x 45 mm front plate, 35 mm handle and metallic legend with black marking

Voltmeter switches (continued)




Wiring diagram	Switching programme	Marking and switch position	Front mounting method	Thermal current (Ith)	Reference	Weight
				A		kg

For measurements between 3 phases and between each of the 3 phases and neutral

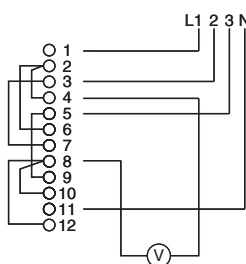

With "0" position	12	K1F 027MLH	0.170
-------------------	----	------------	-------




By Ø 22 mm hole	12	K1F 027MCH	0.190
-----------------	----	------------	-------



Without "0" position	12	K1F 037MLH	0.170
----------------------	----	------------	-------



By Ø 22 mm hole	12	K1F 037MCH	0.190
-----------------	----	------------	-------

For measurements between 3 phases



With "0" position	12	K1D 024MLH	0.140
-------------------	----	------------	-------




By Ø 22 mm hole	12	K1D 024MCH	0.160
-----------------	----	------------	-------



Without "0" position	12	K1D 034MLH	0.140
----------------------	----	------------	-------



By Ø 22 mm hole	12	K1D 034MCH	0.160
-----------------	----	------------	-------

For measurements between 3 phases and between 1 phase and neutral



With "0" position	12	K1E 025MLH	0.160
-------------------	----	------------	-------

By Ø 22 mm hole	12	K1E 025MCH	0.180
-----------------	----	------------	-------



Without "0" position	12	K1E 035MLH	0.160
----------------------	----	------------	-------

By Ø 22 mm hole	12	K1E 035MCH	0.180
-----------------	----	------------	-------

Cam switches

Adaptable sub-assemblies, 12 and 20 A

Bodies (contact blocks + fixing plate)

To combine with operating heads: see pages 3/66
and 3/67

Switches with 45° switching angle



Wiring diagram
and
switching programme

Switch position


Mounting method

Reference, to
be completed
(1)Weight
kg

K00000L

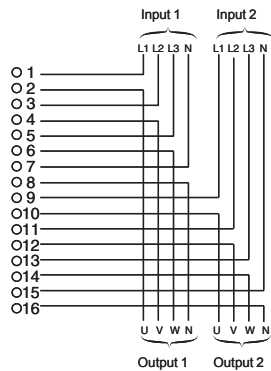

K00000



K00005



K0000X

1-pole



Front

Multi-fixing
By Ø 22 mm hole

K0A 001AL

0.091

Rear

K0A 001A

0.075

K0A 001AX (2) 0.153

K0A 501A 0.115

2-pole



Front

Multi-fixing
By Ø 22 mm hole

K0B 002AL

0.101

Rear

K0B 002A

0.085

K0B 002AX (2) 0.163

K0B 502A 0.125

3-pole



Front

Multi-fixing
By Ø 22 mm hole

K0C 003AL

0.121

Rear

K0C 003A

0.105

K0C 003AX (2) 0.183

K0C 503A 0.140

4-pole



Front

Multi-fixing
By Ø 22 mm hole

K0D 004AL

0.126

Rear

K0D 004A

0.110

K0D 004AX (2) 0.188

K0D 504A 0.150

5-pole



Front

Multi-fixing
By Ø 22 mm hole

K0E 005AL

0.146

Rear

K0E 005A

0.130

K0E 005AX (2) 0.208

K0E 505A 0.165

6-pole



Front

Multi-fixing
By Ø 22 mm hole

K0F 006AL

0.156

Rear

K0F 006A

0.140

K0F 006AX (2) 0.218

K0F 506A 0.175

7-pole



Front

Multi-fixing
By Ø 22 mm hole

K0G 007AL

0.176

Rear

K0G 007A

0.160

K0G 507A 0.190

8-pole



Front

Multi-fixing
By Ø 22 mm hole

K0H 008AL

0.181

Rear

K0H 008A

0.165

K0H 508A 0.195

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.
Example K1A 001A.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.
Example K2A 001A.


(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

To combine with operating heads: see pages 3/66 and 3/67


Switches with 90° switching angle




K0000L

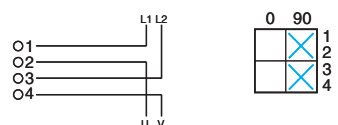


2-pole


	Front	Multi-fixing	K●B 1002HL	0.121
		By Ø 22 mm hole	K●B 1002H	0.105
			K●B 1002HX (2)	0.183

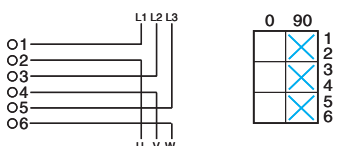

3-pole


	Front	Multi-fixing	K0C 003HL	0.121
		By Ø 22 mm hole	K0C 003H	0.105
			K0C 003HX	(2) 0.183
			Rear	K0C 503H

3-pole with neutral wire terminal and Earth terminal


	Front	Multi-fixing	K●C 023HL	0.121
		By Ø 22 mm hole	K●C 023H	0.105
			K●C 023HX (2)	0.183
	Rear		K●C 523H	0.140




K0000

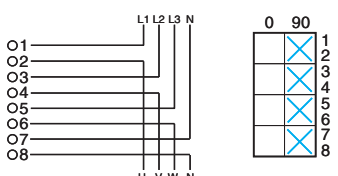


4-pole


	Front	Multi-fixing	K•D 004HL	0.126
		By Ø 22 mm hole	K•D 004H	0.110
			K•D 004HX (2)	0.188
	Rear		K•D 504H	0.150

4-pole with neutral wire terminal and Earth terminal


	Front	Multi-fixing	K•D 024HL	0.126
		By Ø 22 mm hole	K•D 024H	0.110
			K•D 024HX (2)	0.188
	Rear	K•D 524H	0.150	




K0005

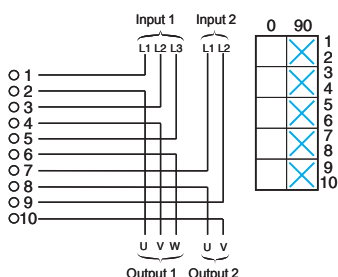

5-pole


	Front	Multi-fixing	K0E 005HL	0.146
		By Ø 22 mm hole	K0E 005H	0.130
			K0E 005HX (2)	0.208
	Rear	K0E 505H	0.165	

5-pole with neutral wire terminal and Earth terminal


	Front	Multi-fixing	K●E 025HL	0.146
		By Ø 22 mm hole	K●E 025H	0.130
	Rear		K●E 525H	0.165




K0000X

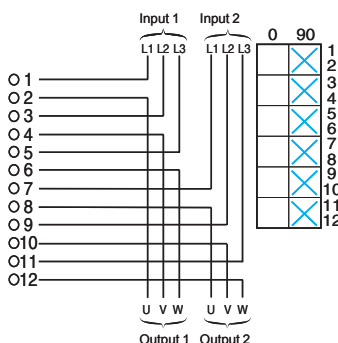

6-pole

	Front	Multi-fixing	K0F 006HL	0.156
		By Ø 22 mm hole	K0F 006H	0.140
			K0F 006HX	(2) 0.218
	Rear		K0F 506H	0.175

6-pole with neutral wire terminal and Earth terminal

	Front	Multi-fixing	K0F 026HL	0.156
		By Ø 22 mm hole	K0F 026H	0.140
	Rear		K0F 526H	0.175

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example K1C 003H.


To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example K2C 003H.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1000.

To combine with operating heads: see pages 3/66 and 3/67

OFF-ON switches with 45° switching angle




Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●A 001AL 0.091
				By Ø 22 mm hole	K●A 001A 0.075
					K●A 001AX (2) 0.153
			Rear	K●A 501A	0.115

OFF-ON switches with spring return from 30° to "0" position



Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●A 001TL 0.091
				By Ø 22 mm hole	K●A 001T 0.075
					K●A 001TX (2) 0.153
			Rear	K●A 501T	0.115

ON-OFF switches with spring return from 30° to "0" position

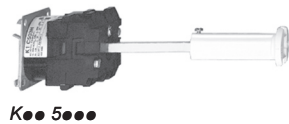

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●A 002TL 0.091
				By Ø 22 mm hole	K●A 002T 0.075
					K●A 002TX (2) 0.153
			Rear	K●A 502T	0.115

OFF-ON switches with spring return from 120° to 90°



Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●B 003TL 0.101
				By Ø 22 mm hole	K●B 003T 0.085
			Rear	K●B 503T	0.125

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example K1A 001A.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.




Example K2A 001A.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

To combine with operating heads: see pages 3/66 and 3/67






K●● 0●●●L

OFF-ON switches with spring return from 30° and from 330° to “0” position						
Wiring diagram and switching programme		Switch position	Mounting method		Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●B 004TL	0.101
				By Ø 22 mm hole	K●B 004T	0.085
			Rear		K●B 504T	0.115
						






K●● 0●●●

OFF-ON switches with momentary-contact function					
Wiring diagram and switching programme	Switch position	Mounting method		Reference, to be completed (1)	Weight kg
		Front	Multi-fixing	K●B 001DL	0.101
			By Ø 22 mm hole	K●B 001D	0.085
				K●B 001DX (2)	0.163
		Rear		K●B 501D	0.125
					



K●● 5●●●

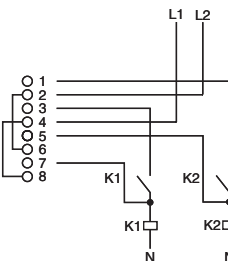OFF-ON changeover switches with spring return from 240° to 270° and from 120° to 90°					
Wiring diagram and switching programme	Switch position	Mounting method		Reference, to be completed (1)	Weight kg
		Front	Multi-fixing	K●D 005TL	0.126
			By Ø 22 mm hole	K●D 005T	0.110
		Rear		K●D 505T	0.150
					



K●● 0●●●X

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example K1B 004T.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.



Example K2B 004T.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

Cam switches
Adaptable sub-assemblies, 12 and 20 A
Bodies (contact blocks + fixing plate)

To combine with operating heads: see pages 3/66
and 3/67

3


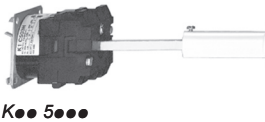




Changeover switches with "0" position				
Wiring diagram and switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
 	1-pole	Front	Multi-fixing By Ø 22 mm hole	K●B 001UL 0.101 K●B 001U 0.085 K●B 001UX (2) 0.163
		Rear		K●B 501U 0.125
	2-pole	Front	Multi-fixing By Ø 22 mm hole	K●D 002UL 0.126 K●D 002U 0.110 K●D 002UX (2) 0.188
		Rear		K●D 502U 0.150
	3-pole	Front	Multi-fixing By Ø 22 mm hole	K●F 003UL 0.156 K●F 003U 0.140 K●F 003UX (2) 0.218
		Rear		K●F 503U 0.175
	4-pole	Front	Multi-fixing By Ø 22 mm hole	K●H 004UL 0.181 K●H 004U 0.165 K●H 004UX (2) 0.243
		Rear		K●H 504U 0.195
	5-pole	Front	Multi-fixing By Ø 22 mm hole	K●K 005UL 0.211 K●K 005U 0.195 K●K 005UX (2) 0.273
		Rear		K●K 505U 0.210

(1) To order a cam switch with thermal current Ith = 12 A, replace the ● in the reference by 1.
Example **K1B 001U**.
To order a cam switch with thermal current Ith = 20 A, replace the ● in the reference by 2.
Example **K2B 001U**.
(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

To combine with operating heads: see pages 3/66 and 3/67

Changeover switches without "0" position

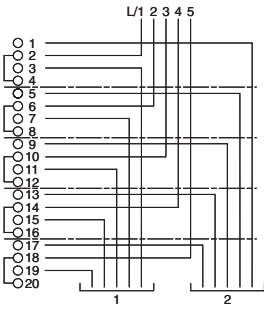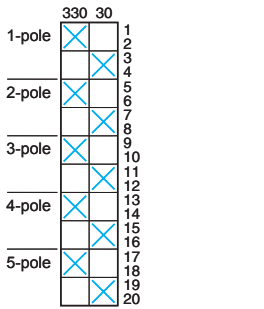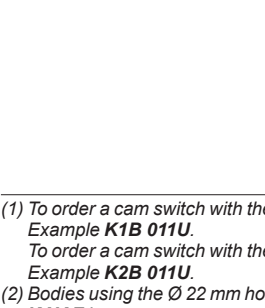Wiring diagram and switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
	1-pole	Front	Multi-fixing	K●B 011UL 0.101
			By Ø 22 mm hole	K●B 011U 0.085
		Rear	K●B 011UX (2) 0.163	
	2-pole	Front	Multi-fixing	K●D 012UL 0.126
			By Ø 22 mm hole	K●D 012U 0.110
		Rear	K●D 012UX (2) 0.188	
	3-pole	Front	Multi-fixing	K●F 013UL 0.156
			By Ø 22 mm hole	K●F 013U 0.140
		Rear	K●F 013UX (2) 0.218	
	4-pole	Front	Multi-fixing	K●H 014UL 0.181
			By Ø 22 mm hole	K●H 014U 0.165
		Rear	K●H 014UX (2) 0.243	
	5-pole	Front	Multi-fixing	K●K 015UL 0.211
			By Ø 22 mm hole	K●K 015U 0.195
		Rear	K●K 015UX (2) 0.273	
	5-pole	Front	Multi-fixing	K●K 015UL 0.211
			By Ø 22 mm hole	K●K 015U 0.195
		Rear	K●K 015UX (2) 0.273	



(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example **K1B 011U**.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example **K2B 011U**.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

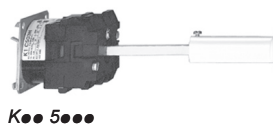




To combine with operating heads: see pages 3/66 and 3/67

Reversing switches with "0" position






K●● 0●●●L

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed ⁽¹⁾	Weight kg
			Front	Multi-fixing	K●B 001UL 0.101
			By Ø 22 mm hole	K●B 001U 0.085	
				K●B 001UX ⁽²⁾ 0.163	
			Rear	K●B 501U	0.125


Reversing switches with spring return from 315° and from 45° to "0" position






K●● 0●●●

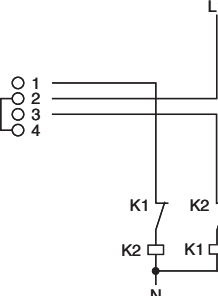Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●B 006TL 0.101
			By Ø 22 mm hole	K●B 006T 0.085	
				K●B 006TX (2) 0.163	
			Rear	K●B 506T	0.125


Reversing switches with momentary-contact function






K●● 5●●●

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●C 002DL 0.121
			By Ø 22 mm hole	K●C 002D 0.105	
				K●C 002DX (2) 0.183	
			Rear	K●C 502D	0.140

Reversing switches with spring return from 240° to 270° and from 120° to 90° position



K●● 0●●●X

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing	K●C 007TL 0.121
				By Ø 22 mm hole	K●C 007T 0.105
			Rear		K●C 507T 0.140

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.
Example K1B 001U.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example K2B 001U.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

To combine with operating heads: see pages 3/66 and 3/67

BCD encoded output switches with "0" position


Wiring diagram	Switching programme	Switch position	Mounting method	Reference (1)	Weight kg																																																												
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>45</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>135</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>225</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>270</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>315</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					45	2					90	3					135	4					180	5					225	6					270	7					315	1 decimal									
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					45																																																										
		2					90																																																										
		3					135																																																										
		4					180																																																										
		5					225																																																										
		6					270																																																										
		7					315																																																										
	Front	Multi-fixing By Ø 22 mm hole	K1A 001BL K1A 001B K1A 001BX (2)	0.101 0.085 0.163																																																													
	Rear		K1A 501B	0.125																																																													
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>45</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>135</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>225</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>270</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>315</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					45	2					90	3					135	4					180	5					225	6					270	7					315	2 decimal									
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					45																																																										
		2					90																																																										
		3					135																																																										
		4					180																																																										
		5					225																																																										
		6					270																																																										
		7					315																																																										
	Front	Multi-fixing By Ø 22 mm hole	K1B 002BL K1B 002B K1B 002BX (2)	0.101 0.085 0.163																																																													
	Rear		K1B 502B	0.125																																																													
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>45</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>135</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>225</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>270</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>315</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					45	2					90	3					135	4					180	5					225	6					270	7					315	3 decimal									
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					45																																																										
		2					90																																																										
		3					135																																																										
		4					180																																																										
		5					225																																																										
		6					270																																																										
		7					315																																																										
	Front	Multi-fixing By Ø 22 mm hole	K1B 003BL K1B 003B K1B 003BX (2)	0.101 0.085 0.163																																																													
	Rear		K1B 503B	0.125																																																													
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>45</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>135</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>225</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>270</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>315</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					45	2					90	3					135	4					180	5					225	6					270	7					315	4 decimal									
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					45																																																										
		2					90																																																										
		3					135																																																										
		4					180																																																										
		5					225																																																										
		6					270																																																										
		7					315																																																										
	Front	Multi-fixing By Ø 22 mm hole	K1C 004BL K1C 004B K1C 004BX (2)	0.121 0.105 0.183																																																													
	Rear		K1C 504B	0.140																																																													
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>45</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>135</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>225</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>270</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>315</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					45	2					90	3					135	4					180	5					225	6					270	7					315	5 decimal									
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					45																																																										
		2					90																																																										
		3					135																																																										
		4					180																																																										
		5					225																																																										
		6					270																																																										
		7					315																																																										
	Front	Multi-fixing By Ø 22 mm hole	K1C 005BL K1C 005B K1C 005BX (2)	0.121 0.105 0.183																																																													
	Rear		K1C 505B	0.140																																																													
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>45</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>135</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>225</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>270</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>315</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					45	2					90	3					135	4					180	5					225	6					270	7					315	6 decimal									
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					45																																																										
		2					90																																																										
		3					135																																																										
		4					180																																																										
		5					225																																																										
		6					270																																																										
		7					315																																																										
	Front	Multi-fixing By Ø 22 mm hole	K1C 006BL K1C 006B K1C 006BX (2)	0.121 0.105 0.183																																																													
	Rear		K1C 506B	0.140																																																													
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>45</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>135</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>225</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>270</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>315</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					45	2					90	3					135	4					180	5					225	6					270	7					315	7 decimal									
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					45																																																										
		2					90																																																										
		3					135																																																										
		4					180																																																										
		5					225																																																										
		6					270																																																										
		7					315																																																										
	Front	Multi-fixing By Ø 22 mm hole	K1C 007BL K1C 007B K1C 007BX (2)	0.121 0.105 0.183																																																													
	Rear		K1C 507B	0.140																																																													
	<table><tr><th>Contact marking Value</th><th>8</th><th>65</th><th>43</th><th>21</th><th></th></tr><tr><td>0</td><td></td><td></td><td></td><td></td><td>0</td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td>30</td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td>60</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td>90</td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td>120</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td>150</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td>180</td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td>210</td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td>240</td></tr></table>	Contact marking Value	8	65	43	21		0					0	1					30	2					60	3					90	4					120	5					150	6					180	7					210	8					240	8 decimal			
		Contact marking Value	8	65	43	21																																																											
		0					0																																																										
		1					30																																																										
		2					60																																																										
		3					90																																																										
		4					120																																																										
		5					150																																																										
		6					180																																																										
		7					210																																																										
8					240																																																												
	Front	Multi-fixing By Ø 22 mm hole	K1D 008BL K1D 008B K1D 008BX (2)	0.126 0.110 0.188																																																													
	Rear		K1D 508B	0.150																																																													

(1) $I_{th} = 12$ A.


(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1...**

To combine with operating heads: see pages 3/66 and 3/67

BCD encoded output switches with "0" position (continued)

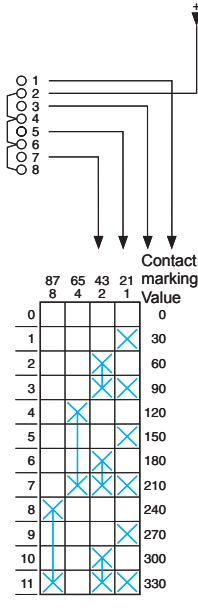Wiring diagram and switching programme	Switch position	Mounting method	Reference (1)	Weight kg
	9 decimal			
	Front	Multi-fixing	K1D 009BL	0.126
		By Ø 22 mm hole	K1D 009B	0.110
	Rear		K1D 009BX (2)	0.188
			K1D 509B	0.150
	10 decimal			
	Front	Multi-fixing	K1D 010BL	0.126
		By Ø 22 mm hole	K1D 010B	0.110
	Rear		K1D 510B	0.150
	11 decimal			
	Front	Multi-fixing	K1D 011BL	0.126
		By Ø 22 mm hole	K1D 011B	0.110
	Rear		K1D 511B	0.150

BCD encoded output switches without "0" position

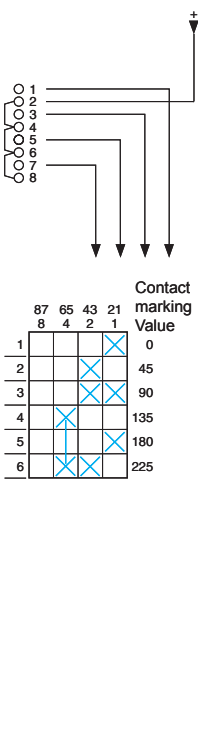Wiring diagram and switching programme	Switch position	Mounting method	Reference (1)	Weight kg
	1 and 2 decimal			
	Front	Multi-fixing	K1B 022BL	0.101
		By Ø 22 mm hole	K1B 022B	0.085
	Rear		K1B 022BX (2)	0.163
			K1B 522B	0.125
	3 decimal			
	Front	Multi-fixing	K1B 023BL	0.101
		By Ø 22 mm hole	K1B 023B	0.085
	Rear		K1B 023BX (2)	0.163
			K1B 523B	0.125
	4 decimal			
	Front	Multi-fixing	K1C 024BL	0.121
		By Ø 22 mm hole	K1C 024B	0.105
	Rear		K1C 024BX (2)	0.183
			K1C 524B	0.140
	5 decimal			
	Front	Multi-fixing	K1C 025BL	0.121
		By Ø 22 mm hole	K1C 025B	0.105
	Rear		K1C 025BX (2)	0.183
			K1C 525B	0.140
	6 decimal			
	Front	Multi-fixing	K1C 026BL	0.121
		By Ø 22 mm hole	K1C 026B	0.105
	Rear		K1C 026BX (2)	0.183
			K1C 526B	0.140

(1) $I_{th} = 12\text{ A}$.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1...**.

To combine with operating heads: see pages 3/66 and 3/67

BCD encoded output switches without "0" position (continued)

Wiring diagram and switching programme	Switch position	Mounting method	Reference (1)	Weight kg																																																																					
 <table><tr><th></th><th>87</th><th>65</th><th>43</th><th>21</th></tr><tr><th>8</th><th>4</th><th>2</th><th>1</th></tr><tr><td>1</td><td></td><td></td><td></td><td>X</td></tr><tr><td>2</td><td></td><td></td><td></td><td>X</td></tr><tr><td>3</td><td></td><td></td><td></td><td>X</td></tr><tr><td>4</td><td>X</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td>X</td></tr><tr><td>6</td><td></td><td></td><td></td><td>X</td></tr><tr><td>7</td><td></td><td></td><td></td><td>X</td></tr><tr><td>8</td><td>X</td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td>X</td></tr><tr><td>10</td><td></td><td></td><td></td><td>X</td></tr><tr><td>11</td><td></td><td></td><td></td><td>X</td></tr><tr><td>12</td><td>X</td><td></td><td></td><td></td></tr></table>		87	65	43	21	8	4	2	1	1				X	2				X	3				X	4	X				5				X	6				X	7				X	8	X				9				X	10				X	11				X	12	X				7 decimal			
		87	65	43	21																																																																				
	8	4	2	1																																																																					
	1				X																																																																				
	2				X																																																																				
	3				X																																																																				
	4	X																																																																							
	5				X																																																																				
	6				X																																																																				
	7				X																																																																				
	8	X																																																																							
	9				X																																																																				
10				X																																																																					
11				X																																																																					
12	X																																																																								
	Front	Multi-fixing	K1C 027BL	0.121																																																																					
		By Ø 22 mm hole	K1C 027B	0.105																																																																					
	Rear		K1C 027BX (2)	0.183																																																																					
			K1C 527B	0.140																																																																					
8 decimal																																																																									
	Front	Multi-fixing	K1D 028BL	0.126																																																																					
		By Ø 22 mm hole	K1D 028B	0.110																																																																					
	Rear		K1D 028BX (2)	0.188																																																																					
			K1D 528B	0.150																																																																					
9 decimal																																																																									
	Front	Multi-fixing	K1D 029BL	0.126																																																																					
		By Ø 22 mm hole	K1D 029B	0.110																																																																					
	Rear		K1D 029BX (2)	0.188																																																																					
			K1D 529B	0.150																																																																					
10 decimal																																																																									
	Front	Multi-fixing	K1D 030BL	0.126																																																																					
		By Ø 22 mm hole	K1D 030B	0.110																																																																					
	Rear		K1D 030BX (2)	0.188																																																																					
			K1D 530B	0.150																																																																					
11 decimal																																																																									
	Front	Multi-fixing	K1D 031BL	0.126																																																																					
		By Ø 22 mm hole	K1D 031B	0.110																																																																					
	Rear		K1D 031BX (2)	0.188																																																																					
			K1D 531B	0.150																																																																					
12 decimal																																																																									
	Front	Multi-fixing	K1D 032BL	0.126																																																																					
		By Ø 22 mm hole	K1D 032B	0.110																																																																					
	Rear		K1D 032BX (2)	0.188																																																																					
			K1D 532B	0.150																																																																					

(1) $I_{th} = 12$ A.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

To combine with operating heads: see pages 3/66 and 3/67

Paralleling switches with "0" position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
1-pole for 2 loads					
			Front	Multi-fixing By Ø 22 mm hole	K●B 002GL 0.101 K●B 002G 0.085 K●B 002GX (2) 0.163
			Rear		K●B 502G 0.125
1-pole for 3 loads					
			Front	Multi-fixing By Ø 22 mm hole	K●C 003GL 0.121 K●C 003G 0.105 K●C 003GX (2) 0.183
			Rear		K●C 503G 0.140
1-pole for 4 loads					
			Front	Multi-fixing By Ø 22 mm hole	K●D 004GL 0.126 K●D 004G 0.110 K●D 004GX (2) 0.188
			Rear		K●D 504G 0.150
2-pole for 2 loads					
			Front	Multi-fixing By Ø 22 mm hole	K●D 012GL 0.126 K●D 012G 0.110 K●D 012GX (2) 0.188
			Rear		K●D 512G 0.150
2-pole for 3 loads					
			Front	Multi-fixing By Ø 22 mm hole	K●F 013GL 0.156 K●F 013G 0.140 K●F 013GX (2) 0.218
			Rear		K●F 513G 0.175

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example **K1B 002G**.







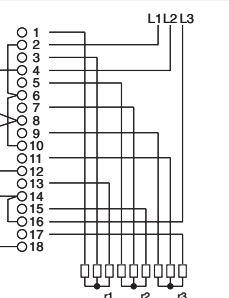
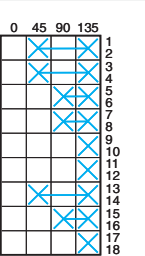

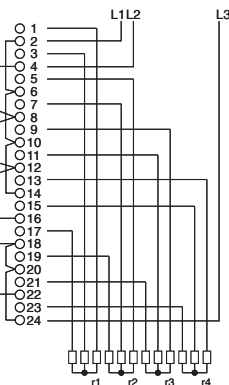
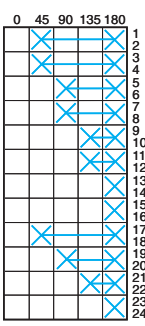

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example **K2B 002G**.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

To combine with operating heads: see pages 3/66 and 3/67

Paralleling switches with "0" position (continued)

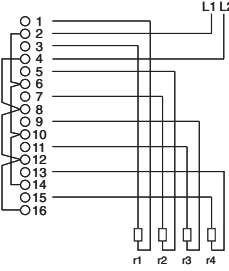Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
2-pole for 4 loads					
			Front	Multi-fixing	K●H 014GL 0.181
			By Ø 22 mm hole	K●H 014G 0.165	
				K●H 014GX (2) 0.243	
			Rear	K●H 514G 0.195	
3-pole for 2 loads					
			Front	Multi-fixing	K●F 022GL 0.156
			By Ø 22 mm hole	K●F 022G 0.140	
				K●F 022GX (2) 0.218	
			Rear	K●F 522G 0.175	
3-pole for 3 loads					
			Front	Multi-fixing	K●I 023GL 0.201
			By Ø 22 mm hole	K●I 023G 0.185	
				K●I 023GX (2) 0.263	
			Rear	K●I 523G 0.215	
3-pole for 4 loads					
			Front	Multi-fixing	K●M 024GL 0.241
			By Ø 22 mm hole	K●M 024G 0.225	
				K●M 024GX (2) 0.303	
			Rear	K●M 524G 0.245	

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example **K1H 014G**.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example **K2H 014G**.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.


Cam switches
Adaptable sub-assemblies, 12 and 20 A
Bodies (contact blocks + fixing plate)

To combine with operating heads: see pages 3/66
and 3/67


3



K●● 0●●●L

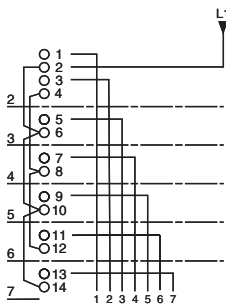

K●● 0●●●

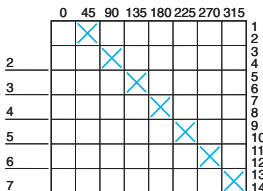

K●● 5●●●



K●● 0●●●X

Stepping switches (2 to 11 step), single-pole, with "0" position				
Wiring diagram and switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
		Front	Multi-fixing	K●B 002QL 0.101
		Rear	By Ø 22 mm hole	K●B 002Q 0.085
			K●B 002QX (2)	0.163
			K●B 502Q	0.125
		Front	Multi-fixing	K●C 003QL 0.121
		Rear	By Ø 22 mm hole	K●C 003Q 0.105
			K●C 003QX (2)	0.183
			K●C 503Q	0.140
		Front	Multi-fixing	K●D 004QL 0.126
		Rear	By Ø 22 mm hole	K●D 004Q 0.110
			K●D 004QX (2)	0.188
			K●D 504Q	0.150
		Front	Multi-fixing	K●E 005QL 0.146
		Rear	By Ø 22 mm hole	K●E 005Q 0.130
			K●E 005QX (2)	0.208
			K●E 505Q	0.165
		Front	Multi-fixing	K●F 006QL 0.156
		Rear	By Ø 22 mm hole	K●F 006Q 0.140
			K●F 006QX (2)	0.218
			K●F 506Q	0.175
		Front	Multi-fixing	K●G 007QL 0.176
		Rear	By Ø 22 mm hole	K●G 007Q 0.160
			K●G 007QX (2)	0.238
			K●G 507Q	0.190

(1) To order a cam switch with thermal current I_{th} = 12 A, replace the ● in the reference by 1.
Example K1B 002Q.
To order a cam switch with thermal current I_{th} = 20 A, replace the ● in the reference by 2.
Example K2B 002Q.
(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

To combine with operating heads: see pages 3/66 and 3/67

Stepping switches (2 to 11 step), single-pole, with "0" position (continued)

Wiring diagram and switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg	
8 step + "0"					
		Front	Multi-fixing	K●H 008QL	0.181
		By Ø 22 mm hole	K●H 008Q	0.165	
			K●H 008QX	(2) 0.243	
			Rear	K●H 508Q	0.195
9 step + "0"					
		Front	Multi-fixing	K●I 009QL	0.201
		By Ø 22 mm hole	K●I 009Q	0.185	
			K●I 009QX	(2) 0.263	
			Rear	K●I 509Q	0.215
10 step + "0"					
		Front	Multi-fixing	K●K 010QL	0.211
		By Ø 22 mm hole	K●K 010Q	0.195	
			K●K 010QX	(2) 0.273	
			Rear	K●K 510Q	0.220
11 step + "0"					
		Front	Multi-fixing	K●L 011QL	0.231
		By Ø 22 mm hole	K●L 011Q	0.215	
			K●L 011QX	(2) 0.293	
			Rear	K●L 511Q	0.240

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example K1H 008Q.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.


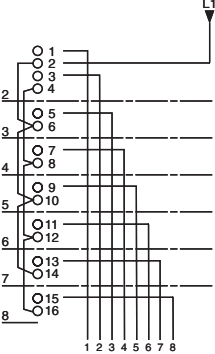

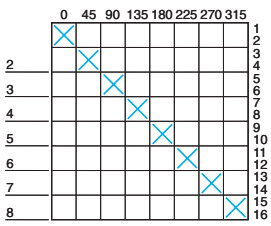









Example K2H 008Q.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

Cam switches
Adaptable sub-assemblies, 12 and 20 A
Bodies (contact blocks + fixing plate)

To combine with operating heads: see pages 3/66
and 3/67

Stepping switches (2 to 12 step), single-pole, without “0” position

Wiring diagram and switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
 K0000L   K0000   K0005  K0000X	2 step 	Front Multi-fixing By Ø 22 mm hole	K0B 002NL K0B 002N K0B 002NX (2) K0B 502N	0.101 0.085 0.163 0.125
	3 step 	Front Multi-fixing By Ø 22 mm hole	K0C 003NL K0C 003N K0C 003NX (2) K0C 503N	0.121 0.105 0.183 0.140
	4 step 	Front Multi-fixing By Ø 22 mm hole	K0D 004NL K0D 004N K0D 004NX (2) K0D 504N	0.126 0.110 0.188 0.150
	5 step 	Front Multi-fixing By Ø 22 mm hole	K0E 005NL K0E 005N K0E 005NX (2) K0E 505N	0.146 0.130 0.208 0.165
	6 step 	Front Multi-fixing By Ø 22 mm hole	K0F 006NL K0F 006N K0F 006NX (2) K0F 506N	0.156 0.140 0.218 0.175
	7 step 	Front Multi-fixing By Ø 22 mm hole	K0G 007NL K0G 007N K0G 007NX (2) K0G 507N	0.176 0.160 0.238 0.190
	8 step 	Front Multi-fixing By Ø 22 mm hole	K0H 008NL K0H 008N K0H 008NX (2) K0H 508N	0.181 0.165 0.243 0.195

(1) To order a cam switch with thermal current Ith = 12 A, replace the ● in the reference by 1.
Example **K1B 002N**.
To order a cam switch with thermal current Ith = 20 A, replace the ● in the reference by 2.
Example **K2B 002N**.
(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1000**.

To combine with operating heads: see pages 3/66 and 3/67

Stepping switches (2 to 12 step), single-pole, without "0" position (continued)

Wiring diagram and switching programme

Switch position


Mounting method

Reference, to be completed (1)


Weight kg



K●● 0●●●L





K●● 0●●●




K●● 5●●●



K●● 0●●●X

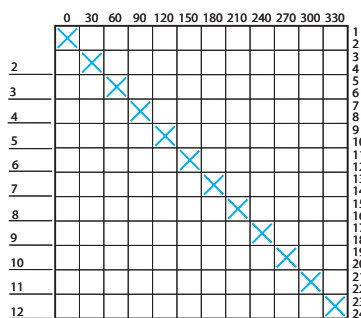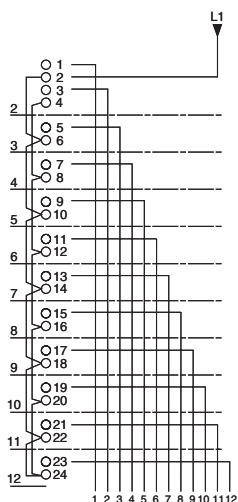

9 step



Front

Multi-fixing
By Ø 22 mm
hole

K●I 009NL

0.201

K●I 009N

0.185

K●I 009NX

(2)


0.263

Rear

K●I 509N

0.215

10 step



Front

Multi-fixing
By Ø 22 mm
hole

K●K 010NL

0.211

K●K 010N

0.195

K●K 010NX

(2)


0.273

Rear

K●K 510N

0.220

11 step



Front

Multi-fixing
By Ø 22 mm
hole

K●L 011NL

0.231

K●L 011N

0.215

K●L 011NX

(2)


0.293

Rear

K●L 511N

0.240

12 step



Front

Multi-fixing
By Ø 22 mm
hole

K●M 021NL

0.241

K●M 021N

0.225

K●M 021NX

(2)

0.303

Rear

K●M 521N

0.245

(1) To order a cam switch with thermal current $I_{th} = 12\text{ A}$, replace the ● in the reference by 1.

Example K1I 009N.

To order a cam switch with thermal current $I_{th} = 20\text{ A}$, replace the ● in the reference by 2.

Example K2I 009N.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

To combine with operating heads: see pages 3/66 and 3/67

Stepping switches (2 to 6 step), 2-pole, with "0" position

Wiring diagram and switching programme

Switch position


Mounting method

Reference, to be completed (1)

Weight kg



K●● 0●●●L

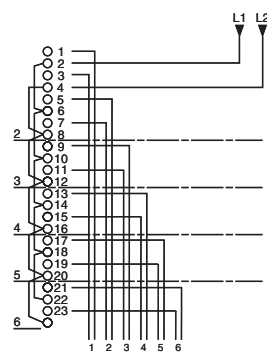

2 step + "0"



Front

Multi-fixing

K●D 012QL

0.126

By Ø 22 mm hole

K●D 012Q

0.110

Rear

K●D 012QX (2)

0.188

K●D 512Q

0.150

3 step + "0"



Front

Multi-fixing

K●F 013QL

0.156

By Ø 22 mm hole

K●F 013Q

0.140


Rear

K●F 013QX (2)


0.218

K●F 513Q

0.175



K●● 0●●●

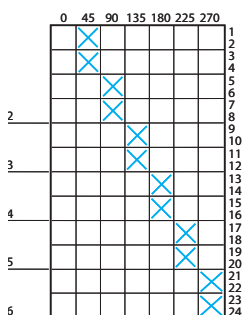

4 step + "0"



Front

Multi-fixing

K●H 014QL

0.181

By Ø 22 mm hole

K●H 014Q

0.165

Rear

K●H 014QX (2)

0.243

K●H 514Q

0.195



K●● 5●●●

5 step + "0"



Front

Multi-fixing

K●K 015QL

0.211

By Ø 22 mm hole

K●K 015Q

0.195

Rear


K●K 015QX (2)

0.273

K●K 515Q

0.220

6 step + "0"



Front

Multi-fixing

K●M 016QL

0.241

By Ø 22 mm hole

K●M 016Q

0.225


Rear

K●M 016QX (2)

0.303

K●M 516Q

0.245



K●● 0●●●X








(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.
Example K1D 012Q.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.
Example K2D 012Q.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

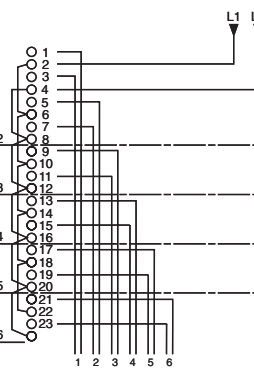To combine with operating heads: see pages 3/66 and 3/67

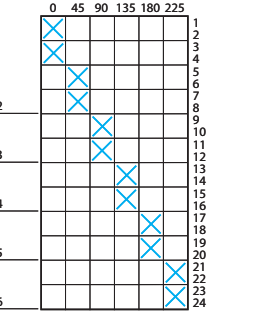Stepping switches (2 to 6 step), 2-pole, without "0" position

Wiring diagram and switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg	
	2 step 	Front	Multi-fixing	K●D 012NL 0.126	
		By Ø 22 mm hole	K●D 012N 0.110		
			K●D 012NX (2) 0.188		
		Rear	K●D 512N 0.150		
	3 step 	Front	Multi-fixing	K●F 013NL 0.156	
		By Ø 22 mm hole	K●F 013N 0.140		
			K●F 013NX (2) 0.218		
		Rear	K●F 513N 0.175		
		4 step 	Front	Multi-fixing	K●H 014NL 0.181
			By Ø 22 mm hole	K●H 014N 0.165	
			K●H 014NX (2) 0.243		
Rear			K●H 514N 0.195		
5 step 		Front	Multi-fixing	K●K 015NL 0.211	
		By Ø 22 mm hole	K●K 015N 0.195		
			K●K 015NX (2) 0.273		
		Rear	K●K 515N 0.220		
6 step 		Front	Multi-fixing	K●M 016NL 0.241	
		By Ø 22 mm hole	K●M 016N 0.225		
		K●M 016NX (2) 0.303			
	Rear	K●M 516N 0.245			







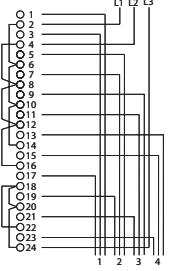


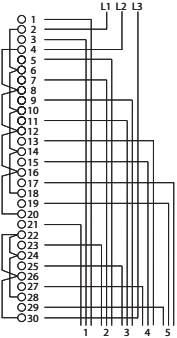


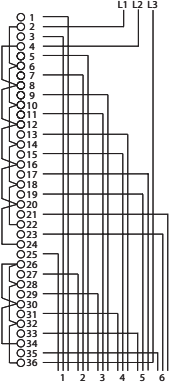


(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.
Example K1D 012N.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.
Example K2D 012N.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1000.

To combine with operating heads: see pages 3/66 and 3/67

Stepping switches (2 to 6 step), 3-pole, with "0" position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
2 step + "0"					
			Front	Multi-fixing K●F 022QL	0.156
			By Ø 22 mm hole	K●F 022Q	0.140
				K●F 022QX (2)	0.218
			Rear	K●F 522Q	0.175
3 step + "0"					
			Front	Multi-fixing K●I 023QL	0.201
			By Ø 22 mm hole	K●I 023Q	0.185
				K●I 023QX (2)	0.263
			Rear	K●I 523Q	0.215
4 step + "0"					
			Front	Multi-fixing K●M 024QL	0.241
			By Ø 22 mm hole	K●M 024Q	0.225
				K●M 024QX (2)	0.303
			Rear	K●M 524Q	0.245
5 step + "0"					
			Front	Multi-fixing K●P 025QL	0.286
			By Ø 22 mm hole	K●P 025Q	0.270
				K●P 025QX (2)	0.348
			Rear	K●P 525Q	0.285
6 step + "0"					
			Front	Multi-fixing K●S 026QL	0.321
			By Ø 22 mm hole	K●S 026Q	0.305
				K●S 026QX (2)	0.383
			Rear	K●S 526Q	0.320





















(1) To order a cam switch with thermal current $I_{th} = 12\text{ A}$, replace the ● in the reference by 1.
Example **K1F 022Q**.

To order a cam switch with thermal current $I_{th} = 20\text{ A}$, replace the ● in the reference by 2.
Example **K2F 022Q**.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

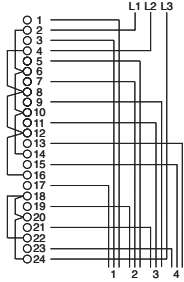To combine with operating heads: see pages 3/66 and 3/67

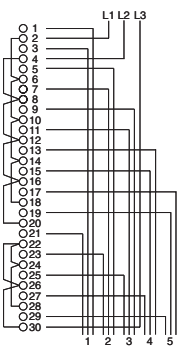Stepping switches (2 to 6 step), 3-pole, without "0" position

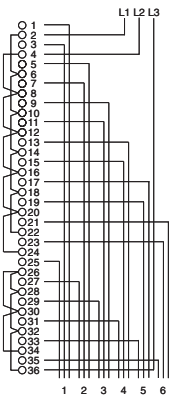Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
 K●● 0●●●L			2 step 	Front Multi-fixing K●F 022NL 0.156	0.156
				By Ø 22 mm hole K●F 022N 0.140	
				K●F 022NX (2) 0.218	0.175
				Rear K●F 522N 0.175	
 K●● 0●●●			3 step 	Front Multi-fixing K●I 023NL 0.201	0.201
				By Ø 22 mm hole K●I 023N 0.185	
				K●I 023NX (2) 0.263	0.215
				Rear K●I 523N 0.215	
 K●● 0●●●			4 step 	Front Multi-fixing K●M 024NL 0.241	0.241
				By Ø 22 mm hole K●M 024N 0.225	
				K●M 024NX (2) 0.303	0.245
				Rear K●M 524N 0.245	
 K●● 5●●●			5 step 	Front Multi-fixing K●P 025NL 0.286	0.286
				By Ø 22 mm hole K●P 025N 0.270	
				K●P 025NX (2) 0.348	0.285
				Rear K●P 525N 0.285	
 K●● 0●●●X			6 step 	Front Multi-fixing K●S 026NL 0.321	0.321
				By Ø 22 mm hole K●S 026N 0.305	
				K●S 026NX (2) 0.383	0.320
				Rear K●S 526N 0.320	

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.
Example K1F 022N.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.
Example K2F 022N.




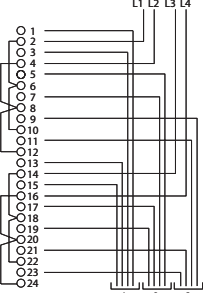
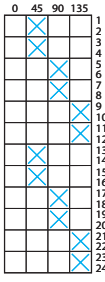

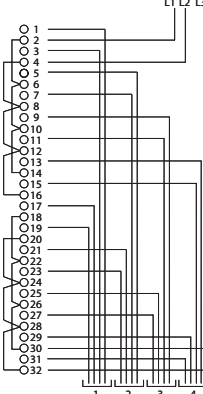
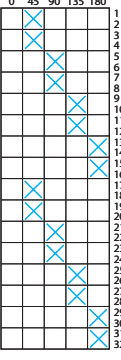

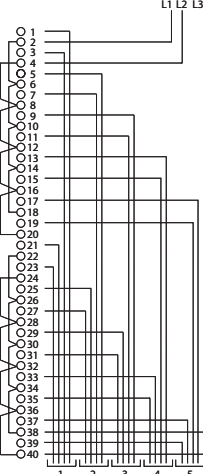
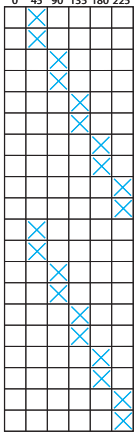

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

Cam switches

Adaptable sub-assemblies, 12 and 20 A
Bodies (contact blocks + fixing plate)

To combine with operating heads: see pages 3/66
and 3/67

















Stepping switches (2 to 5 step), 4-pole, with "0" position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing K●H 032QL	0.181
			By Ø 22 mm hole	K●H 032Q	0.165
			Rear	K●H 032QX (2)	0.200
				K●H 532Q	0.195
			Front	Multi-fixing K●M 033QL	0.241
			By Ø 22 mm hole	K●M 033Q	0.225
			Rear	K●M 533Q	0.245
			Front	Multi-fixing K●Q 034QL	0.296
			By Ø 22 mm hole	K●Q 034Q	0.280
			Rear	K●Q 534Q	0.295
			Front	Multi-fixing K●U 035QL	0.351
			By Ø 22 mm hole	K●U 035Q	0.335
			Rear	K●U 535Q	0.345

(1) To order a cam switch with thermal current $I_{th} = 12\text{ A}$, replace the ● in the reference by 1.
Example **K1H 032Q**.
To order a cam switch with thermal current $I_{th} = 20\text{ A}$, replace the ● in the reference by 2.
Example **K2H 032Q**.
(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

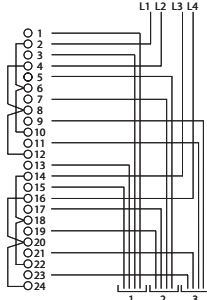To combine with operating heads: see pages 3/66 and 3/67

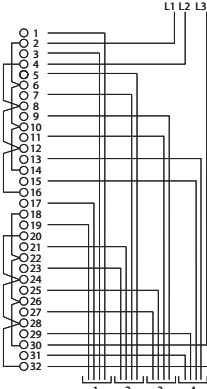Stepping switches (2 to 5 step), 4-pole, without "0" position

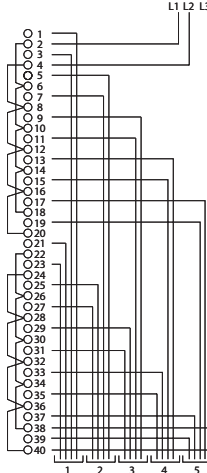Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
 <p>K●● 0●●●L</p>			2 step 	Front	Multi-fixing K●H 032NL 0.181
				By Ø 22 mm hole K●H 032N 0.165	
 <p>K●● 0●●●</p>			3 step 	Front	Multi-fixing K●M 033NL 0.241
				By Ø 22 mm hole K●M 033N 0.225	
 <p>K●● 5●●●</p>			4 step 	Front	Multi-fixing K●Q 034NL 0.296
				By Ø 22 mm hole K●Q 034N 0.280	
 <p>K●● 0●●●X</p>			5 step 	Front	Multi-fixing K●U 035NL 0.351
				By Ø 22 mm hole K●U 035N 0.335	
				Rear	K●H 532N 0.195
				Rear	K●M 533N 0.245
				Rear	K●Q 534N 0.295
				Rear	K●U 535N 0.345

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example **K1H 032N**.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example **K2H 032N**.


(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

Cam switches

Adaptable sub-assemblies, 12 and 20 A
Bodies (contact blocks + fixing plate)

To combine with operating heads: see pages 3/66 and 3/67


3



K0000L



K10000

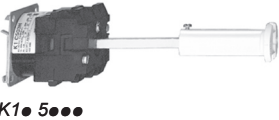

K15000



K10000X

Ammeter switches with “0” position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference (1)	Weight kg
For 3 circuits					
			Front	Multi-fixing	K1F 003ML 0.156
				By Ø 22 mm hole	K1F 003M 0.140
					K1F 003MX (2) 0.218
			Rear		K1F 503M 0.175

For 4 circuits					
			Front	Multi-fixing	K1H 004ML 0.181
				By Ø 22 mm hole	K1H 004M 0.165
					K1H 004MX (2) 0.243
			Rear		K1H 504M 0.195

Ammeter switches without “0” position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference (1)	Weight kg
For 3 circuits					
			Front	Multi-fixing	K1F 013ML 0.156
				By Ø 22 mm hole	K1F 013M 0.140
					K1F 013MX (2) 0.218
			Rear		K1F 513M 0.175

For 4 circuits					
			Front	Multi-fixing	K1H 014ML 0.181
				By Ø 22 mm hole	K1H 014M 0.165
					K1H 014MX (2) 0.243
			Rear		K1H 514M 0.195

(1) I_{th} = 12 A.
(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1000.




To combine with operating heads: see pages 3/66 and 3/67

Voltmeter switches

Wiring diagram	Switching programme	Switch position	Mounting method	Reference (1)	Weight kg
----------------	---------------------	-----------------	-----------------	---------------	-----------


For measurements between 3 phases and neutral

With "0" position



Front	Multi-fixing	K1D 023ML	0.126
	By Ø 22 mm hole	K1D 023M	0.110
Rear		K1D 023MX (2)	0.188
		K1D 523M	0.150

Without "0" position





Front	Multi-fixing	K1D 033ML	0.126
	By Ø 22 mm hole	K1D 033M	0.110
Rear		K1D 533M	0.150




For measurements between 3 phases

With "0" position




Front	Multi-fixing	K1D 024ML	0.126
	By Ø 22 mm hole	K1D 024M	0.110
Rear		K1D 024MX (2)	0.188
		K1D 524M	0.150

Without "0" position






Front	Multi-fixing	K1D 034ML	0.126
	By Ø 22 mm hole	K1D 034M	0.110
Rear		K1D 534M	0.150

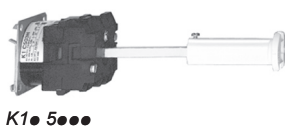


For measurements between 3 phases and between 1 phase and neutral

With "0" position



Front	Multi-fixing	K1E 025ML	0.146
	By Ø 22 mm hole	K1E 025M	0.130
Rear		K1E 025MX (2)	0.208
		K1E 525M	0.165

Without "0" position



Front	Multi-fixing	K1E 035ML	0.146
	By Ø 22 mm hole	K1E 035M	0.130
		K1E 535M	0.165



(1) $I_{th} = 12$ A.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1...

To combine with operating heads: see pages 3/66 and 3/67

Stepping switches (2 and 3 step), with "0" position + left-hand position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
			Front	Multi-fixing K●C 002LL	0.121
			By Ø 22 mm hole	K●C 002L	0.105
				K●C 002LX (2)	0.183
			Rear	K●C 502L	0.140
			Front	Multi-fixing K●D 003LL	0.126
			By Ø 22 mm hole	K●D 003L	0.110
				K●D 003LX (2)	0.188
			Rear	K●D 503L	0.150
			Front	Multi-fixing K●F 012LL	0.156
			By Ø 22 mm hole	K●F 012L	0.140
				K●F 012LX (2)	0.218
			Rear	K●F 512L	0.175
			Front	Multi-fixing K●H 013LL	0.181
			By Ø 22 mm hole	K●H 013L	0.165
				K●H 013LX (2)	0.243
			Rear	K●H 513L	0.195
			Front	Multi-fixing K●I 022LL	0.201
			By Ø 22 mm hole	K●I 022L	0.185
				K●I 522L	0.210
			Rear		
			Front	Multi-fixing K●M 023LL	0.241
			By Ø 22 mm hole	K●M 023L	0.225
				K●M 523L	0.245
			Rear		

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example **K1C 022Q**.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example **K2C 022Q**.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

K● 0●●●L

K● 0●●●

K● 5●●●

K● 0●●●X

To combine with operating heads: see pages 3/66 and 3/67

Multi-circuit switches

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
1-pole					
			Front	Multi-fixing By Ø 22 mm hole	K●B 001SL 0.101 K●B 001S 0.085 K●B 001SX (2) 0.163
			Rear	K●B 501S	0.125
2-pole					
			Front	Multi-fixing By Ø 22 mm hole	K●D 002SL 0.126 K●D 002S 0.110 K●D 002SX (2) 0.188
			Rear	K●D 502S	0.150
3-pole					
			Front	Multi-fixing By Ø 22 mm hole	K●F 003SL 0.156 K●F 003S 0.140 K●F 003SX (2) 0.218
			Rear	K●F 503S	0.175
4-pole					
			Front	Multi-fixing By Ø 22 mm hole	K●H 004SL 0.181 K●H 004S 0.165
			Rear	K●H 504S	0.195
5-pole					
			Front	Multi-fixing By Ø 22 mm hole	K●K 005SL 0.211 K●K 005S 0.195
			Rear	K●K 505S	0.220

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example **K1F 003S**.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example **K2F 003S**.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.



K●● 0●●●L

3



K●● 0●●●



K●● 5●●●



K●● 0●●●X

To combine with operating heads: see pages 3/66 and 3/67



Reversing switches with "0" position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
----------------	---------------------	-----------------	-----------------	--------------------------------	-----------

2-pole



K●● 0●●●L





Front	Multi-fixing	K●D 002WL	0.126
	By Ø 22 mm hole	K●D 002W	0.110
		K●D 002WX (2)	0.188
Rear		K●D 502W	0.150

3-pole



K●● 0●●●



Front	Multi-fixing	K●E 003WL	0.146
	By Ø 22 mm hole	K●E 003W	0.130
		K●E 003WX (2)	0.208
Rear		K●E 503W	0.165



Reversing switches with spring return from 330° and from 30° to "0" position

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
----------------	---------------------	-----------------	-----------------	--------------------------------	-----------

2-pole




K●● 5●●●





Front	Multi-fixing	K●D 022WL	0.126
	By Ø 22 mm hole	K●D 022W	0.110
		K●D 022WX (2)	0.188
Rear		K●D 522W	0.150

3-pole



K●● 0●●●X



Front	Multi-fixing	K●E 023WL	0.146
	By Ø 22 mm hole	K●E 023W	0.130
		K●E 023WX (2)	0.208
Rear		K●E 523W	0.165

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.
Example K1D 002W.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.
Example K2D 002W.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

Cam switches
Adaptable sub-assemblies, 12 A
Bodies (contact blocks + fixing plate)

To combine with operating heads: see pages 3/66
and 3/67


3



K2 0...L

Star-delta switches					
Wiring diagram	Switching programme	Switch position	Mounting method	Reference (1)	Weight kg
			Front Multi-fixing	K2H 001YL	0.181
			By Ø 22 mm hole	K2H 001Y	0.165
				K2H 001YX (2)	0.243
			Rear	K2H 501Y	0.195

With slave contact, without supply disconnection					
			Front Multi-fixing	K2G 003YL	0.176
			By Ø 22 mm hole	K2G 003Y	0.160
				K2G 003YX (2)	0.238
			Rear	K2G 503Y	0.190



K2 0...

With slave contact, with supply disconnection					
			Front Multi-fixing	K2K 004YL	0.211
			By Ø 22 mm hole	K2K 004Y	0.195
				K2K 004YX (2)	0.273
			Rear	K2K 504Y	0.220



K2 5...

Reversing star-delta switches					
Wiring diagram	Switching programme	Switch position	Mounting method	Reference (1)	Weight kg
Without slave contact					
			Front Multi-fixing	K2K 006YL	0.211
			By Ø 22 mm hole	K2K 006Y	0.195
				K2K 506Y	0.220






K2 0...X

(1) I_{th} = 20 A.
(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1...




To combine with operating heads: see pages 3/66 and 3/67

Reversing star-delta switches (continued)

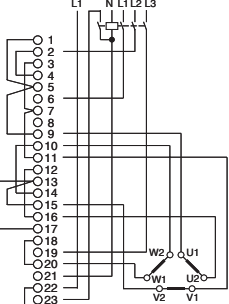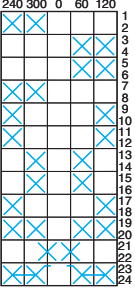Wiring diagram	Switching programme	Switch position	Mounting method	Reference (2)	Weight kg
With slave contact					
			Front Multi-fixing By Ø 22 mm hole	K2M 007YL K2M 007Y K2M 507Y	0.241 0.225 0.245




K●● 0●●●L

Pole change switches for 2-speed motors

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg	
For motors with 2 separate windings						
			Front	Multi-fixing	K●F 001PL	0.156
				By Ø 22 mm hole	K●F 001P	0.140
					K●F 001PX	(3) 0.218
			Rear		K●F 501P	0.175




K●● 0●●●

For motors with 2 separate windings, with centre "0" position

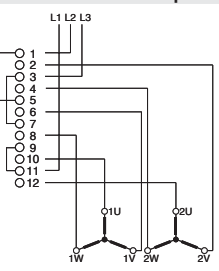			Front	Multi-fixing	K●F 002PL	0.156
				By Ø 22 mm hole	K●F 002P	0.140
					K●F 002PX (3)	0.218
			Rear		K●F 502P	0.175

K●● 5●●●

For motors with tapped "Dahlander" windings

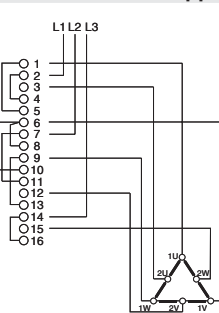			Front		Multi-fixing	K●H 004PL	0.181	
					By Ø 22 mm hole	K●H 004P	0.165	
						K●H 004PX	(3)	0.243
			Rear			K●H 504P		0.195

K●● 0●●●X

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example **K1F 001P**.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example **K2F 001P**.

(2) $I_{th} = 20$ A.

(3) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type **KAX Z1●●●**.

To combine with operating heads: see pages 3/66 and 3/67



Pole change switches for 2-speed motors (continued)

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
----------------	---------------------	-----------------	-----------------	--------------------------------	-----------

For motors with tapped "Dahlander" windings, with centre "0" position



K●● 0●●●L

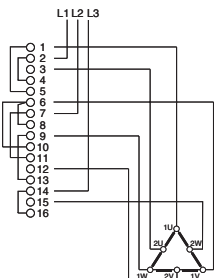

Front	Multi-fixing	K●H 005PL	0.181
	By Ø 22 mm hole	K●H 005P	0.165
Rear		K●H 005PX (2)	0.243
		K●H 505P	0.195



Reversing pole change switches for 2-speed motors

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
----------------	---------------------	-----------------	-----------------	--------------------------------	-----------

For motors with 2 separate windings, with centre "0" position



K●● 0●●●

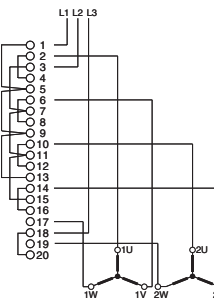

Front	Multi-fixing	K●K 008PL	0.211
	By Ø 22 mm hole	K●K 008P	0.195
Rear		K●K 508P	0.220





K●● 5●●●

For motors with tapped "Dahlander" windings, with centre "0" position

Front	Multi-fixing	K●M 009PL	0.241
	By Ø 22 mm hole	K●M 009P	0.225
Rear		K●M 509P	0.245



K●● 0●●●X

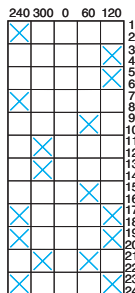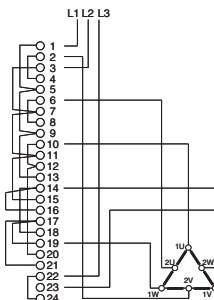

(1) To order a cam switch with thermal current $I_{th} = 12$ A, replace the ● in the reference by 1.

Example K1H 005P.

To order a cam switch with thermal current $I_{th} = 20$ A, replace the ● in the reference by 2.

Example K2H 005P.

(2) Bodies using the Ø 22 mm hole mounting method that can be fitted with chromium plated metal bezel operating heads, type KAX Z1●●●.

To combine with operating heads: see pages 3/66 and 3/67


Pole change switches for 3-speed motors

Wiring diagram	Switching programme	Switch position	Mounting method	Reference, to be completed (1)	Weight kg
----------------	---------------------	-----------------	-----------------	--------------------------------	-----------

For motors with open tapped "Dahlander" winding and separate winding for low speed



K●● 0●●●L

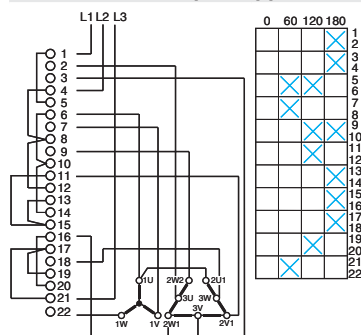


Front	Multi-fixing	K●L 010PL	0.231
	By Ø 22 mm hole	K●L 010P	0.215
Rear		K●L 510P	0.240

For motors with open tapped "Dahlander" winding and separate winding for intermediate speed




K●● 0●●●

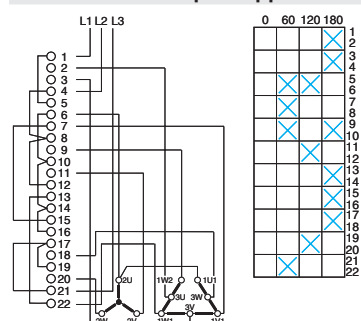


Front	Multi-fixing	K●L 011PL	0.231
	By Ø 22 mm hole	K●L 011P	0.215
Rear		K●L 511P	0.240

For motors with open tapped "Dahlander" winding and separate winding for high speed



K●● 5●●●

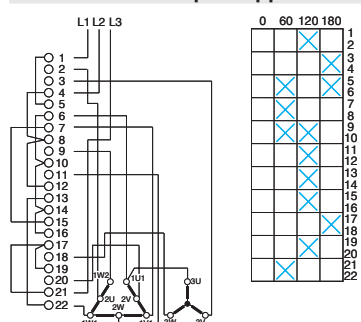

Front	Multi-fixing	K●L 012PL	0.231
	By Ø 22 mm hole	K●L 012P	0.215
Rear		K●L 512P	0.240



K●● 0●●●X

(1) To order a cam switch with thermal current $I_{th} = 12 A$, replace the ● in the reference by 1.
 Example K1L 010P.
 To order a cam switch with thermal current $I_{th} = 20 A$, replace the ● in the reference by 2.
 Example K2L 010P.


To combine with bodies: see pages 3/34 to 3/65




KBG 3H




KCG 3Y




KAC 1H



KCC 1Y




KBC 1●







KBD 1H

Heads for “multi-fixing” front mounting bodies

Description	Switching angle and marking	Type of operator	Background colour of legend	Padlocking device	Reference	Weight kg
With 45 x 45 mm front plate and handle						
With blank legend (for engraving by user)	—	Black handle L = 35 mm	Matt black	Without	KAG 3H	0.012
			Metallic	Without	KBG 3H	0.012
With marked legend	90° 	Red handle L = 35 mm	Yellow	Without	KCG 3H	0.012
				With	KCG 3Y	0.024
Without legend (1)	—	Black handle L = 35 mm	—	Without	KDG 3H	0.010
		Red handle L = 35 mm	—	With	KDG 3Y	0.022


Heads for Ø 22 mm hole, front mounting bodies

Description	Switching angle and marking	Type of operator	Background colour of legend	Padlocking device	Reference	Weight kg
With 45 x 45 mm front plate and handle						
With blank legend (for engraving by user)	—	Black handle L = 35 mm	Matt black	Without	KAC 1H	0.048
			Metallic	Without	KBC 1H	0.048
With marked legend	45° 	Black handle L = 35 mm	Matt black	Without	KAC 1H41	0.012
			Metallic	Without	KBC 1H41	0.012
	45° 	Black handle L = 35 mm	Matt black	Without	KAC 1H48	0.012
			Metallic	Without	KBC 1H48	0.012
	60° 	Black handle L = 35 mm	Matt black	Without	KAC 1H61	0.048
			Metallic	Without	KBC 1H61	0.048
	90° 	Red handle L = 35 mm	Yellow	Without	KCC 1LH	0.048
				With	KCC 1Y	0.060
Without legend (1)	—	Black handle L = 35 mm	—	Without	KDC 1H	0.046
		Red handle L = 35 mm	—	Without	KDC 1LH	0.046

With 45 x 45 mm front plate and key operator (2)

With blank legend (for engraving by user)	45° and 90°	Key (2)	Matt black	Without	KAC 1S	0.063
			Metallic	Without	KBC 1S	0.063
	60°	Key (2)	Matt black	Without	KAC 1Z	0.063
			Metallic	Without	KBC 1Z	0.063
Without legend (1)	45° and 90°	Key (2)	—	Without	KDC 1S	0.061
	60°	Key (2)	—	Without	KDC 1Z	0.061


With 60 x 60 mm front plate and handle

With blank legend (for engraving by user)	—	Black handle L = 42 mm	Matt black	Without	KAD 1H	0.053
			Metallic	Without	KBD 1H	0.053
With marked legend	90° 	Red handle L = 42 mm	Yellow	Without	KCD 1MH	0.053
Without legend (1)	—	Black handle L = 42 mm	—	Without	KDD 1H	0.053

(1) For separate marked legend ordering information, see pages 3/68 to 3/71.

(2) Head supplied with “Ronis” 8R1 key. To order a head with a “Ronis” 455 key, add the suffix **R** to the references listed above.
Example: reference for Ø 22 mm hole, front mounting 45 x 45 mm operating head with 45° switching angle and matt black legend, becomes **KAC 1SR**. For a head with “Ronis” 8R15 key, use the suffix **R1**.

To combine with bodies: see pages 3/34 to 3/65



KBD 1●



KBA 1H



KBA 1●



KAX Z1C12



KBE 1H

Heads for Ø 22 mm hole, front mounting bodies (continued)

Description	Switching angle and marking	Type of operator	Background colour of legend	Padlocking device	Reference	Weight kg
With 60 x 60 mm front plate and key operator (1)						
With blank legend (to be engraved by user)	45° and 90°	Key (1)	Matt black	Without	KAD 1S	0.068
			Metallic	Without	KBD 1S	0.068
	60°	Key (1)	Matt black	Without	KAD 1Z	0.068
			Metallic	Without	KBD 1Z	0.068
Without legend (2)	45° and 90°	Key (1)	–	Without	KDD 1S	0.066
	60°	Key (1)	–	Without	KDD 1Z	0.066

With Ø 29 mm, metallic finish, plastic bezel and handle or key operator (1)

Description	Switching angle and marking	Type of operator	Colour of bezel	Padlocking device	Reference	Weight kg
Circular heads	–	Black handle L = 35 mm	Matt black	Without	KAA 1H	0.042
			Metallic	Without	KBA 1H	0.042
	45°	Key (1)	Matt black	Without	KAA 1S	0.057
			Metallic	Without	KBA 1S	0.057
	60°	Key (1)	Matt black	Without	KAA 1Z	0.057
			Metallic	Without	KBA 1Z	0.057



With Ø 38 mm, black, plastic bezel and handle

Circular head	–	Black handle L = 35 mm	Matt black	Without	KAA 2H	0.048
---------------	---	------------------------	------------	---------	--------	-------

With Ø 28.5 mm chromium plated, metal bezel (3) (2) and standard, handle, long handle or key operator (4)

Circular heads	–	Standard black handle	Metal	Without	KAX Z1M12	0.040
		Standard red handle	Metal	Without	KAX Z1M14	0.040
		Long black handle	Metal	Without	KAX Z1C12	0.040
		Long red handle	Metal	Without	KAX Z1C14	0.040
	30°	Key	Metal	Without	KAX Z1S13● (4)	0.065
	45°	Key	Metal	Without	KAX Z1S14● (4)	0.065
	60°	Key	Metal	Without	KAX Z1S16● (4)	0.065
	90°	Key	Metal	Without	KAX Z1S19● (4)	0.065

Operating heads for 4 hole, rear mounting bodies

Description	Switching angle and marking	Type of operator	Background colour of legend	Padlocking device	Reference	Weight kg
With 45 x 45 mm front plate and handle						
With blank legend (to be engraved by user)	—	Black handle L = 35 mm	Matt black	Without	KAE 1H	0.029
			Metallic	Without	KBE 1H	0.029
With marked legend	90° 	Red handle L = 35 mm	Yellow	Without	KCE 1LH	0.029
				With	KCE 1Y	0.060
Without legend (2)	—	Black handle L = 35 mm	—	Without	KDE 1H	0.027
		Red handle L = 35 mm	—	Without	KDE 1LH	0.027
With 60 x 60 mm front plate and handle						
With blank legend (to be engraved by user)	—	Black handle L = 42 mm	Matt black	Without	KAF 1H	0.068
			Metallic	Without	KBF 1H	0.068
With marked legend	90° 	Red handle L = 42 mm	Yellow	Without	KCF 1MH	0.068
Without legend (2)	—	Black handle L = 42 mm		Without	KDF 1H	0.066

(1) Head supplied with "Ronis" 8R1 key. To order a head with a "Ronis" 455 key, add the suffix **R** to the references listed above.Example: reference for operating head with 60 x 60 mm front plate, key operator, blank legend, 45° switching angle and matt black background, becomes **KAD 1SR**. For a head with "Ronis" 8R15 key, use the suffix **R1**.

(2) For separate marked legend ordering information, see pages 3/68 to 3/71.

(3) Heads **only** for use with bodies **K●● ●●●●X**, incorporating adaptor plate **KZ 127**. See pages 3/34 to 3/64.

(4) To order:

- a head with key n° 455, replace the ● in the reference by 1. Example: **KAX Z1S131**,- a head with key n° 421, replace the ● in the reference by 2. Example: **KAX Z1S132**,- a head with key n° 520, replace the ● in the reference by 3. Example: **KAX Z1S133**,- a head with a special key, replace the ● in the reference by 9. Example: **KAX Z1S139** (state the key number on the order).

Key withdrawal from all positions.

Cam switches

Adaptable sub-assemblies, 12 and 20 A
Legends for **MULTI-FIXING** heads

45 x 45 mm legends - marked (1)

White text on black background

30°

KZ 18032L



KZ 18033L



KZ 18312L



45°

KZ 18041L



KZ 18042L



KZ 18043L



KZ 18044L



KZ 18045L



KZ 18046L



KZ 18047L



KZ 18048L



KZ 18412L



KZ 18413L



KZ 18415L



KZ 18416L



KZ 18417L



KZ 18418L



KZ 18419L



KZ 18420L



KZ 18421L



KZ 18422FL



KZ 18423FL



KZ 18434L



KZ 18436FL



KZ 18451L



60°

KZ 18061L



KZ 18630L



KZ 18631L



KZ 18632L



KZ 18634L



KZ 18635L



KZ 18637L



KZ 18068L



90°

KZ 18091L



KZ 18093L



KZ 18913L



KZ 18931FL



Black text on yellow background

45°

KZ 19041L



90°

KZ 19093L



KZ 19098FL



KZ 19910L



45 x 45 mm legends - unmarked

Colour	Sold in lots of	Unit reference	Weight kg
Black	20	KZ 17L	0.003
Metallic	20	KZ 18L	0.003
Yellow	10	KZ 19L	0.003

(1) Weight = 0.003 kg.

Cam switches

Adaptable sub-assemblies, 12 and 20 A

Legends for Ø 22 mm HOLE mounting heads with plastic bezel

45 x 45 mm legends - marked (1)

Black text on metallic background

30°

KZ 18032



KZ 18312



45°

KZ 18041



KZ 18042



KZ 18043



KZ 18044



KZ 18045



KZ 18046



KZ 18047



KZ 18048



KZ 18412



KZ 18413



KZ 18415



KZ 18416



KZ 18417



KZ 18418



KZ 18419



KZ 18420



KZ 18421



KZ 18422F



KZ 18423F



KZ 18434



KZ 18436F



KZ 18451



60°

KZ 18061



KZ 18630



KZ 18631



KZ 18632



KZ 18634



KZ 18635



KZ 18637



KZ 18068



90°

KZ 18091



KZ 18093



KZ 18913



KZ 18931F



Black text on yellow background

45°

KZ 19041



90°

KZ 19093



KZ 19098F



KZ 19910



45 x 45 mm legends - unmarked

Colour	Sold in lots of	Unit reference	Weight kg
Black	20	KZ 17	0.003
Metallic	20	KZ 18	0.003
Yellow	10	KZ 19	0.003

60 x 60 mm legends - marked (2)

Black text on metallic background

45°

KZ 21041



KZ 21412



KZ 21048



KZ 21451



KZ 21635



KZ 21637



KZ 21910



KZ 21093



60 x 60 mm legends - unmarked

Colour	Sold in lots of	Unit reference	Weight kg
Black	20	KZ 20	0.005
Metallic	20	KZ 21	0.005
Yellow	10	KZ 22	0.005

(1) Weight = 0.003 kg.

(2) Weight = 0.005 kg.

Cam switches

Adaptable sub-assemblies, 12 and 20 A
Legends for Ø 22 mm HOLE mounting heads
with chromium plated metal bezel, type KAX Z1●●●

46 x 46 mm - marked (PVC) (1)

White text on black background

30°

XBC Y7226	XBC Y7227	XBC Y7228	XBC Y7229	XBC Y7236	XBC Y2250	XBC Y7238	XBC Y7239

45°

XBC Y7220	XBC Y7221	XBC Y7222	XBC Y7223	XBC Y7224	XBC Y7225	XBC Y7230	XBC Y7231	XBC Y7232	XBC Y7233
XBC Y7234	XBC Y7235	XBC Y2213	XBC Y2214	XBC Y2215	XBC Y2216	XBC Y7217	XBC Y7251		

60°

XBC Y7212	XBC Y7240	XBC Y7241	XBC Y7242	XBC Y7243	XBC Y7268	XBC Y7168	XBC Y7064

90°

XBC Y2211	XBC Y2218	XBC Y2219


46 x 46 mm legends - unmarked (PVC)

Colour	Sold in lots of	Unit reference	Weight kg
Black/red	10	KZ 17X	0.004
White/yellow	10	KZ 19X	0.004


(1) Weight = 0.004 kg.

Cam switches

Adaptable sub-assemblies, 12 and 20 A
Legend holders for heads



KZ 13




KZ 15




KZ 01R



KZ 2



KZ 14

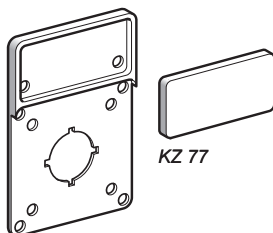

KZ 16

Legend holders with and without legend

Description	For use with heads	Legend marking	Sold in lots of	Unit reference	Weight kg
With blank legend	With 45 x 45 mm front plate (1)	—	5	KZ 13	0.004
	With 60 x 60 mm front plate (1)	—	5	KZ 15	0.010
	Circular, with Ø 29 mm collar	—	5	KZ 01R	0.010
With marked legend	Circular, with Ø 29 mm collar	1 2	1	KZ 1	0.003
		2 0 1	5	KZ 2	0.003

Without legend	With 45 x 45 mm front plate (1)	—	20	KZ 14	0.003
	With 60 x 60 mm front plate (1)	—	10	KZ 16	0.007

Blank legends (for engraving) for legend holders

Description	For use with heads	Sold in lots of	Unit reference	Weight kg
Legend for legend holder KZ 14 Plastic with metallic finish. Self-adhesive. For engraved markings.	With 45 x 45 mm front plate (1)	20	KZ 76	0.002
Legend for legend holder KZ 16 Plastic with metallic finish. Self-adhesive. For engraved markings.	With 60 x 60 mm front plate (1)	10	KZ 77	0.003


(1) Operating heads for single Ø 22 mm hole or 4 hole mounting.

Cam switches


Complete switches, 12 and 20 A
Separate components and accessories




KZ 27H




KZ 27




KZ 32




KZ 83



KZ 127



KZ 140




KZ 141

Handles


Description	Colour	Dimensions	Sold in lots of	Unit reference	Weight
		mm			kg
New shape	Black	35	5	KZ 27H	0.007
		42	5	KZ 28H	0.009
	Red	35	5	KZ 41H	0.007
		42	5	KZ 42H	0.009
Old shape	Black	34	5	KZ 27	0.007
		42	5	KZ 28	0.009

Accessories


Description	For use with	Dimensions	Sold in lots of	Unit reference	Weight
		mm			kg
Door interlocking plate	Rear mounting switches	45 x 45	5	KZ 32	0.010
Plate with rubber seal	Rear mounting switches. IP 65 between front plate and operating head	60 x 60	5	KZ 83	0.018
Adaptor plate, metal (replacement)	Mounting KAX Z1... chromium plated metal bezel heads on front mounting bodies for Ø 22 mm hole	—	1	KZ 127	0.088
Plastic plate (replacement)	Ø 22 mm hole, front mounting, clip-in bodies	—	1	KZ 140	0.010
Multi-fixing plate (replacement)	"Multi-fixing", front mounting, — bodies	—	1	KZ 141	0.026




KZ 6●



KZ 5●



KZ 3●



Z 01




KZ 30



KZ 93




Z 18



KZ 31



KZ 95



KZ 91H

Accessories (continued)

Description	For use with		Sold in lots of	Unit reference	Weight kg
Rubber seals for IP 65 degree of protection	Ø 22 mm or 4 hole, front mounting, operating heads with 45 x 45 mm front plate		5	KZ 65	0.003
	Ø 22 mm or 4 hole, front mounting, operating heads with 60 x 60 mm front plate		5	KZ 66	0.004
	Multi-fixing operating heads with 45 x 45 mm front plate		5	KZ 73	0.004
Shaft couplers	Ø 6 mm shaft	Length = 26 mm	3	KZ 52	0.007
		Length = 60 mm	3	KZ 50	0.013
Terminal covers	Contact blocks	4 contacts	1	KZ 35	0.010
		8 contacts	1	KZ 36	0.020
		12 contacts	1	KZ 37	0.004
		16 contacts	1	KZ 38	0.040
		20 contacts	1	KZ 39	0.050
Nut wrench	M22 fixing nuts		5	Z 01	0.010
Fixing nut, M22	Fixing operating heads on panel or in an enclosure		5	KZ 30	0.007
Mounting adaptor	Converting Ø 30.5 mm fixing hole to Ø 22.5 mm		50	KZ 93	0.003
Keys	8D1 key lock		2	Z 18	0.010
	"Ronis" 8R1 key lock		2	Z 18R1	0.010
	"Ronis" 455 key lock		2	Z 18R	0.010
	"Ronis" 8R15 key lock		2	Z 18R15	0.010
Quick assembly device	Mounting on 35 mm rails to DIN 46277. 2 fixing screws included for rear mounting		5	KZ 31	0.030
Fixing screws 3.5 x 16 mm	4 hole fixing operating heads		100	KZ 95	0.001
Cam switch installation kit	Installation of a cam switch on a distribution panel Comprising: - mounting plate, - 45 x 45 mm front plate, without legend - black handle, length 35 mm (KZ 27H), - 2 fixing screws		1	KZ 91H	0.010




Operating heads and bodies, front mounting

“Multi-fixing”

By Ø 22 mm hole

With plastic base



With metal base

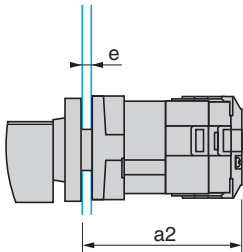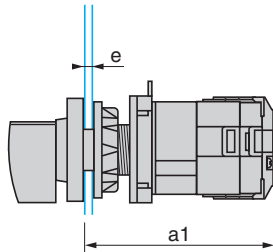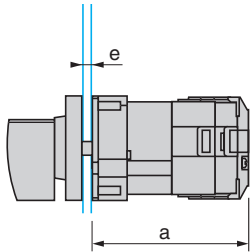

Front mounting by 6 screws Ø 5.2 mm and 55 x 100 mm front plate for cam switch with key operated lock

With plastic base and key locking

Panel cut-out

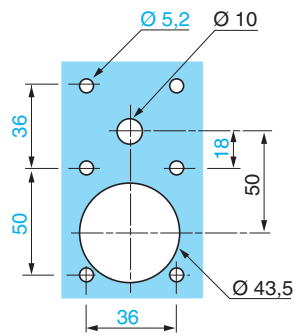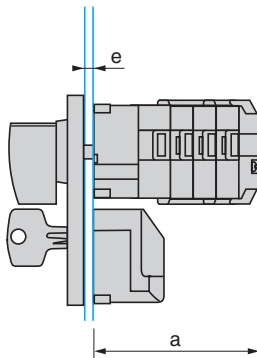


e: support panel thickness 1 to 6 mm.

Type of switch	Operating head + body, front mounting		
	Multi-fixing or by 6 screws Ø 5.2 mm with 55 x 100 mm front plate	By Ø 22 mm hole Plastic base	Metal base
	a	a1	a2
KøA øøøø, KøB øøøø	53	70.5	64
KøC øøøø, KøD øøøø	63	80.5	74
KøE øøøø, KøF øøøø	73	90.5	84
KøG øøøø, KøH øøøø	83	100.5	94
KøI øøøø, KøK øøøø	93	110.5	104
KøL øøøø, KøM øøøø	103	120.5	114
KøN øøøø, KøO øøøø	113	130.5	124
KøP øøøø, KøQ øøøø	123	140.5	134
KøR øøøø, KøS øøøø	133	150.5	144
KøT øøøø, KøU øøøø	143	160.5	154


Bodies

Front mounting "multi-fixing", 2 or 4 screws

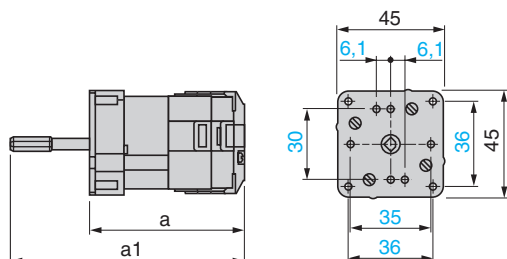


Front mounting by Ø 22 mm hole

With plastic base

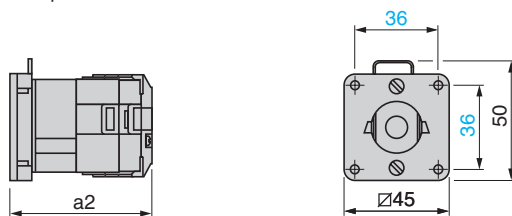


Front mounting by Ø 22 mm hole

With metal base, secured by needle screws

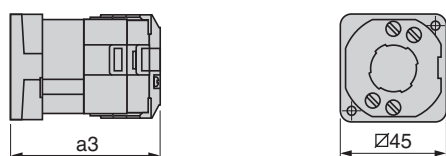

Rear mounting

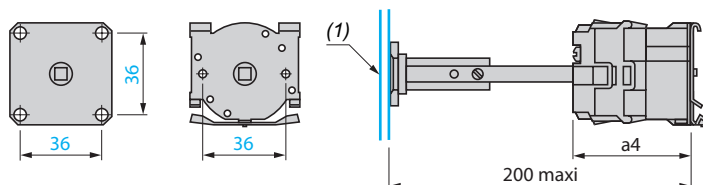


(1) Panel cut-out: Ø 10 mm central hole (see below)

Type of body	Front mounting Multi-fixing		By Ø 22 mm hole		Rear mounting
	a	a1	Plastic base	Metal base	a4
KoA ●●●●, KoB ●●●●	53	77	49	55	42.5
KoC ●●●●, KoD ●●●●	63	87	59	65	52.5
KoE ●●●●, KoF ●●●●	73	97	69	75	62.5
KoG ●●●●, KoH ●●●●	83	107	79	85	72.5
KoI ●●●●, KoK ●●●●	93	117	89	95	82.5
KoL ●●●●, KoM ●●●●	103	127	99	105	92.5
KoN ●●●●, KoO ●●●●	113	137	109	115	102.5
KoP ●●●●, KoQ ●●●●	123	147	119	125	112.5
KoR ●●●●, KoS ●●●●	133	157	129	135	122.5
KoT ●●●●, KoU ●●●●	143	167	139	145	132.5


Operating heads and legend holders

For "multi-fixing", front mounting bodies


KoG 3H



KDG 3Y




Panel cut-out (1)




(1) Ø 10 mm central hole for operating shaft access. 2 or 4 holes for cam switch fixings (choice made by installer).

For Ø 22 mm hole, front mounting bodies - with 45 x 45 mm front plate


KoC 1H, KoC 1H●, KoC 1LH

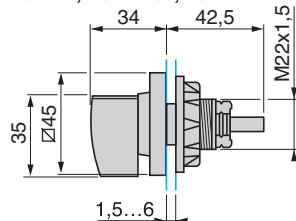


KCC 1Y

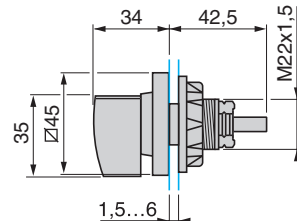


KoC 1S, KoC 1Z

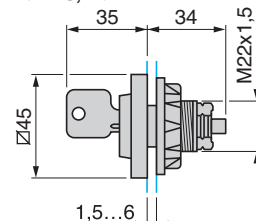

Panel cut-out




KZ 13, KZ 14




Operating heads and legend holders (continued)

For Ø 22 mm hole, front mounting bodies - with 60 x 60 mm front plate


K●D 1H, KCD 1MH

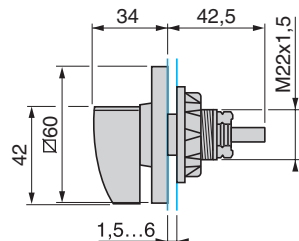


K●D 1S, K●D 1Z

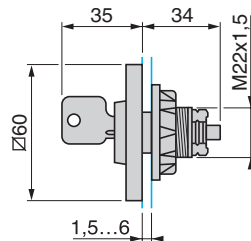


Panel cut-out




KZ 15, KZ 16


For Ø 22 mm hole, front mounting bodies - with Ø 29 mm metallic finish plastic bezel
Head + adaptor plate


K●A 1H

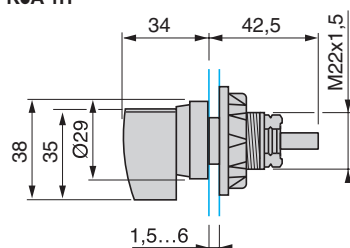


K●A 1S, K●A 1Z

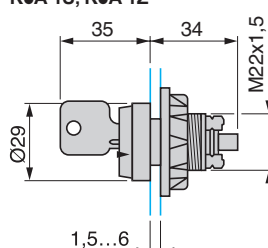

Panel cut-out




KZ 01R, KZ 1, KZ 2




For Ø 22 mm hole, front mounting bodies - with Ø 28.5 mm chromium plated metal bezel


KAX Z1M1● + KZ 127

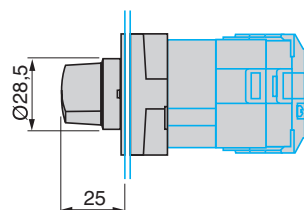


KAX Z1C1● + KZ 127

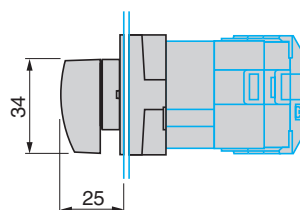


Panel cut-out



KAX Z1S1● + KZ 127

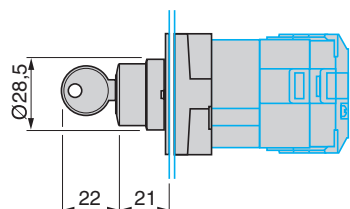


Panel cut-out




For 4 hole, rear mounting bodies - with 45 x 45 mm front plate


K●E 1H, K●E 1LH




KCE 1Y



Panel cut-out



KZ 13, KZ 14




Cam switches

Adaptable sub-assemblies, 12 and 20 A
10 and 16 A cam switches in plastic enclosure


Operating heads and legend holders (continued)

For 4 hole, rear mounting bodies - with 60 x 60 mm front plate


KoF 1H, KCF 1MH



Panel cut-out





KZ 15, KZ 16



Cam switches in plastic enclosure


KA1●●●●G, KA2●●●●G, KD1●●●●G and KD2●●●●G

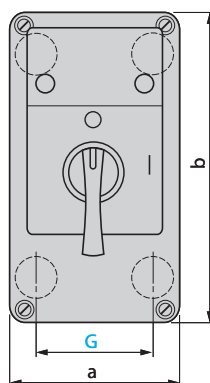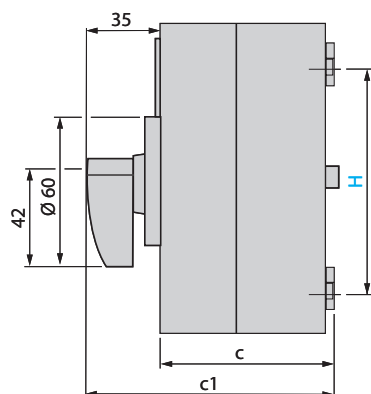

Enclosed cam switch type	a	b	c	c1	G	H	Entries for cable gland (untapped)
K●●-A050G, K●●-C051G, K●●-D052G, K●●-D053G	74	135	72	106	50	95	Top and bottom: 1 entry for n° 16 cable gland
K●●-E054G, K●●-G055G, K●●-F056G, K●●-F057G, K●●-G058G, K●●-G059G, K●●-H060G, K●●-I061G, K●●-K062G, K●●-K053G	105	170	112	146	53	122	Bottom: 2 entries for n° 16 cable gland and 1 entry for n° 11 cable gland


Shaft coupler and door interlock

(minimum door opening radius in mm)

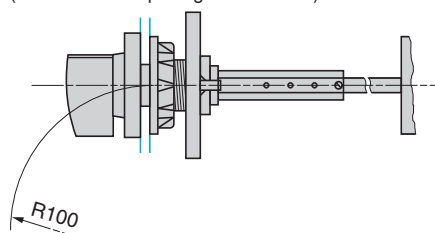

Terminal cover

KZ 3●



Convention used for switching program representation



Contact closed



Contact closed in 2 positions and maintained between the 2 positions




Sealed assembly for auto-maintain control



Overlapping contacts



Spring return position: for a switching angle of 90°, spring return is over 30° after the last position (for a maximum of 3 simultaneous contacts).
Example:



Cam switches
Switches mounted in plastic enclosure,
10 and 16 A

3



KA●●●●●G

“Emergency stop” switches

Specifications

- PVC enclosure.
- 60 x 60 mm operating head, red handle (without padlocking device) (1) on yellow background. Marking: O I.
- Legend holder with metallic finish blank legend.

Composition (2)				Thermal current (Ithe) (3)	Reference	Weight
Poles	N	N/O	N/C			
				A		kg
1	-	-	-	10	KA1 A050G	0.365
				16	KA2 A050G	0.365
3	-	-	-	10	KA1 C051G	0.390
				16	KA2 C051G	0.390
3	1	-	-	10	KA1 D052G	0.400
				16	KA2 D052G	0.400
3	-	1	-	10	KA1 D053G	0.400
				16	KA2 D053G	0.400
3	-	1	1	10	KA1 E054G	0.694
				16	KA2 E054G	0.694
3	-	2	2	10	KA1 G055G	0.719
				16	KA2 G055G	0.719
3	1	1	1	10	KA1 F056G	0.704
				16	KA2 F056G	0.704
6	-	-	-	10	KA1 F057G	0.704
				16	KA2 F057G	0.704
6	1	-	-	10	KA1 G058G	0.719
				16	KA2 G058G	0.719
6	-	1	-	10	KA1 G059G	0.719
				16	KA2 G059G	0.719
6	-	1	1	10	KA1 H060G	0.724
				16	KA2 H060G	0.724
9	-	-	-	10	KA1 I061G	0.744
				16	KA2 I061G	0.744
9	1	-	-	10	KA1 K062G	0.749
				16	KA2 K062G	0.719
9	-	1 (4)	-	10	KA1 K063G	0.719
				16	KA2 K063G	0.719

(1) To order a switch with a red padlockable handle (up to 3 padlocks), replace the letter A (2nd letter) in the references shown above by the letter C.
Example : KA1 A050G becomes KC1 A050G.

(2) Poles : main contacts

- N/O contact : late make (unballasting contact)
- N/C contact : signalling contact
- Neutral conductor (N) : early make, late break.

(3) Permissible power, AC-23 at 400 V :

- K1 switches : 2.2 kW,
- K2 switches : 5.5 kW.

(4) Contact not late make.

Cam switches

Switches mounted in plastic enclosure,
10 and 16 A



KD●●●●●G

OFF-ON switches

Specifications

- PVC enclosure.
- 60 x 60 mm operating head, black handle (without padlocking device) on metallic background. Marking: O I.
- Legend holder with metallic finish blank legend.

Composition (1)				Thermal current (Ithe) (2)	Reference	Weight
Poles	N	N/O	N/C			
				A		kg
1	—	—	—	10	KD1 A050G	0.365
				16	KD2 A050G	0.365
3	—	—	—	10	KD1 C051G	0.390
				16	KD2 C051G	0.390
3	1	—	—	10	KD1 D052G	0.400
				16	KD2 D052G	0.400
3	—	1	—	10	KD1 D053G	0.400
				16	KD2 D053G	0.400
3	—	1	1	10	KD1 E054G	0.694
				16	KD2 E054G	0.694
3	—	2	2	10	KD1 G055G	0.719
				16	KD2 G055G	0.719
3	1	1	1	10	KD1 F056G	0.704
				16	KD2 F056G	0.704
6	—	—	—	10	KD1 F057G	0.704
				16	KD2 F057G	0.704
6	1	—	—	10	KD1 G058G	0.719
				16	KD2 G058G	0.719
6	—	1	—	10	KD1 G059G	0.719
				16	KD2 G059G	0.719
6	—	1	1	10	KD1 H060G	0.724
				16	KD2 H060G	0.724
9	—	—	—	10	KD1 I061G	0.744
				16	KD2 I061G	0.744
9	1	—	—	10	KD1 K062G	0.749
				16	KD2 K062G	0.749
9	—	1 (3)	—	10	KD1 K063G	0.749
				16	KD2 K063G	0.749

(1) Poles : main contacts

- N/O contact : late make (unballasting contact)
- N/C contact : signalling contact
- Neutral conductor (N) : early make, late break.


(2) Permissible power, AC-23 at 400 V :

- K1 switches : 2.2 kW,
- K2 switches : 5.5 kW.

(3) Contact not late make.

Cam switches

Complete switches, 12 A with key operated lock
Front mounting by 6 screws Ø 5.2 mm
with 55 x 100 mm front plate

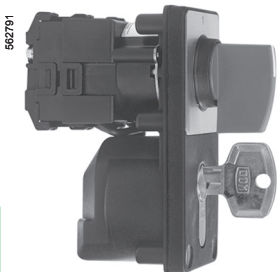




K1C 003NZ2

3

Stepping switches (3 step), without “0” position

Wiring diagram and switching programme	Marking and switch position	Colour of handle	Reference	Weight kg
--	-----------------------------------	---------------------	-----------	--------------

1-pole






Red

K1C 003NZ2 0.170

Black

K1C 003NZ4 0.170

2-pole






Red

K1F 013NZ2 0.170

Black

K1F 013NZ4 0.170

3-pole

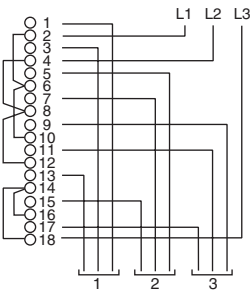

Red

K1I 023NZ2 0.170

Black

K1I 023NZ4 0.170

Cam switches

Complete switches, 12 A with key operated lock
Front mounting by 6 screws Ø 5.2 mm
with 55 x 100 mm front plate

Stepping switches (4 step), 4-pole, without "0" position

Wiring diagram and switching programme	Marking and switch position	Colour of handle	Reference	Weight kg
--	-----------------------------	------------------	-----------	-----------

4 step (1)

Red

K1Q 034NZ2

0.170

Black

K1Q 034NZ4

0.170

4 step with intermediate steps at 30°

Red


K1Q 8621Z1

0.170

(1) Switching programme identical for 4 step and 4 step with intermediate steps at 30°.

Cam switches

Complete switches, 12 A with key operated lock
Front mounting by 6 screws Ø 5.2 mm
with 55 x 100 mm front plate

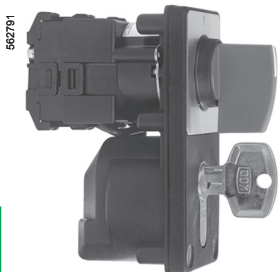

K1D 012QZ2

3

Stepping switches (2 step), with "0" position				
Wiring diagram and switching programme	Marking and switch position	Colour of handle	Reference	Weight kg
2-pole				
		Red	K1D 012QZ2	0.170
		Black	K1D 012QZ4	0.170
3-pole				
		Red	K1F 022QZ2	0.170
		Black	K1F 022QZ4	0.170
4-pole				
		Red	K1H 032QZ2	0.170
		Black	K1H 032QZ4	0.170



Cam switches

Complete switches, 12 A with key operated lock
Front mounting by 6 screws Ø 5.2 mm
with 55 x 100 mm front plate

Stepping switches (3 step), 2-pole, with “0” position

Switching programme	Marking and switch position	Colour of handle	Reference	Weight kg
---------------------	-----------------------------	------------------	-----------	--------------

3 step with intermediate steps at 30°


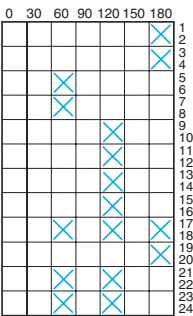


Red	K1M 10317Z1	0.170
-----	--------------------	-------

Stepping switches (5 step), 2-pole, with “0” position

Wiring diagram and switching programme	Marking and switch position	Colour of handle	Reference	Weight kg
--	-----------------------------	------------------	-----------	--------------



5 step (1)

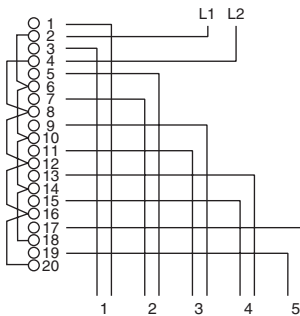

Red	K1K 015NZ2	0.170
-----	-------------------	-------

Black	K1K 015NZ4	0.170
-------	-------------------	-------


5 step with intermediate steps at 30°

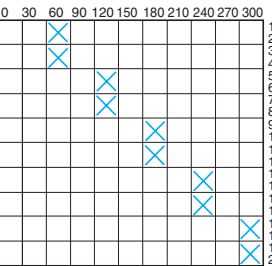

Red	K1K 1060Z1	0.170
-----	-------------------	-------


(1) Switching programme identical for 5 step and 5 step with intermediate steps at 30°.

Complete switches, 12 A with key operated lock
Front mounting by 6 screws Ø 5.2 mm
with 55 x 100 mm front plate



Switching programme	Marking and switch position	Colour of handle	Reference	Weight kg
---------------------	-----------------------------	------------------	-----------	--------------

0	60	120	180	
	X	X	X	1
	X			2
				3
		X		4
				5
			X	6
				7
				8



Red

K1D 032RZ2

0.170




Black

K1D 032RZ4

0.170

	0	60	120	180	
1		X	X	X	
2					
3		X			
4					
5			X		
6					
7				X	
8					
9		X			
10					
11			X		
12					
13				X	



Red

K1G 043RZ2


0.170

Black

K1G 043RZ4

0.170

	0	30	60	90	120	150	180
1			X		X		X
2			X				X
3			X				X
4							
5					X		
6							
7							X
8							
9			X		X		
10			X				
11			X				
12			X		X		
13							
14							
15							X
16							
17			X		X		
18							




Red

K1I 9289Z1

0 170

Cam switches

Complete switches, 12 A with key operated lock
Front mounting by 6 screws Ø 5.2 mm
with 55 x 100 mm front plate

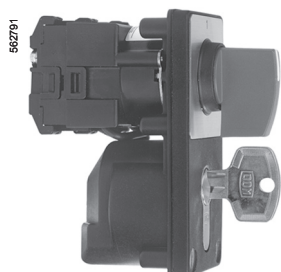

K1B 001U72

Start selector switches (4-position) with “0” position

[illegible]

Changeover switches with “0” position

Wiring diagram and switching programme	Marking and switch position	Colour of handle	Reference	Weight kg
1-pole				
		Red	K1B 001UZ2	0.170
		Black	K1B 001UZ4	0.170

2-pole

Red

K1D 002UZ2 0.170

Black

K1D 002UZ4 0.170

3-pole

[illegible]

Cam switches

Complete switches, 32 to 150 A


The range of K30 to K150 cam switches (32 to 150 A ratings) comprises only complete switches.

These products are more specifically designed for direct control of simple machines.

Complete switches

- switches
- ON-OFF switches
- changeover switches
- star-delta switches
- pole change switches
- reversing switches

Front mounting

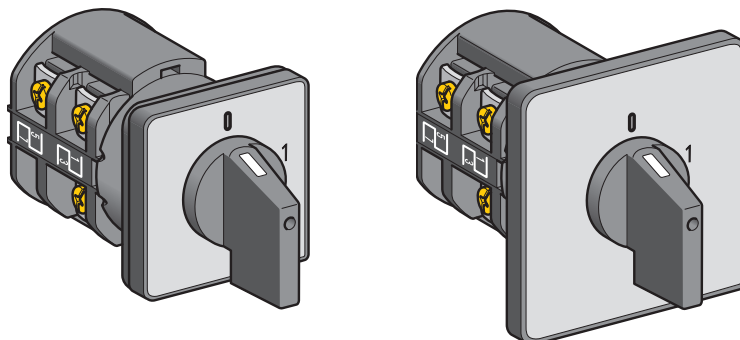


By 4 holes
with 64 x 64 mm front plate
32 to 63 A ratings
K30, K50 and K63

By 4 holes
with 88 x 88 mm front plate
115 to 150 A ratings
K115 and K150

"Multi-fixing" mounting

Rear mounting

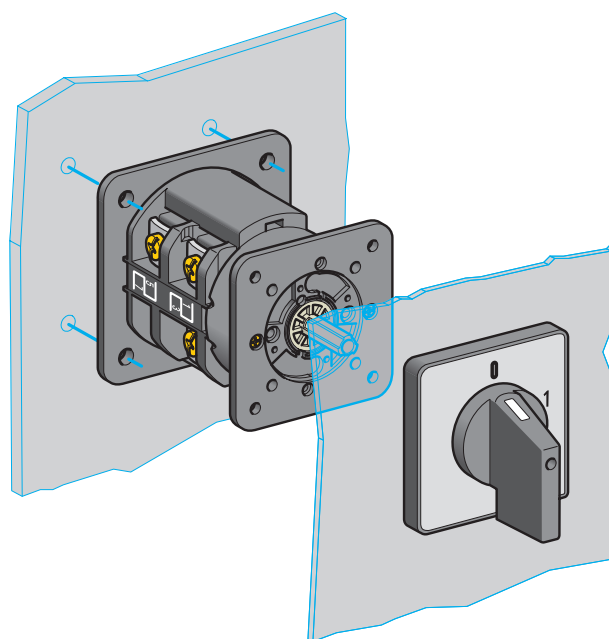

By 4 holes on 48 mm centres
32 to 63 A ratings
K30, K50 and K63

By 4 holes on 68 mm centres
115 to 150 A ratings
K115 and K150

Switch type				K30	K50	K63	K115	K150	
Environment characteristics									
Conformity to standards		UL 508 EN/IEC 60947-3							
Product certifications	cULus	120 V - 1-phase	2 hp	3 hp	3 hp	5 hp	7.5 hp		
		240 V - 1-phase	5 hp	7.5 hp	7.5 hp	10 hp	15 hp		
		240 V - 3-phase	5 hp	7.5 hp	10 hp	20 hp	25 hp		
		480 V - 3-phase	20 hp	25 hp	25 hp	30 hp	40 hp		
Protective treatment		Standard version: "TC"							
Ambient air temperature	For operation	- 25...+ 55 °C							
	For storage	- 40...+ 70 °C							
Electric shock protection		Class II, conforming to IEC 61140							
Degree of protection		IP 40							
Conforming to IEC 60529									
Mechanical life		300,000 operating cycles							
Contact block characteristics									
Rated insulation voltage		Ui = 690 V conforming to EN/IEC 60947-1 - Degree of pollution 3							
Conventional thermal current	Screw clamp terminals	In open air	Ith = 32 A	Ith = 50 A	Ith = 63 A	Ith = 115 A	Ith = 150 A		
Rated operational characteristics									
Conforming to EN/IEC 60947-5-1	~ AC-15		220...240 V	14 A	16 A	—	—		
			380...440 V	6 A	7 A	—	—		
Conforming to EN/IEC 60947-3	~ AC-3	3-phase	220...240 V	5.5 kW	7.5 kW	11 kW	15 kW	22 kW	
		3-pole	380...440 V	11 kW	15 kW	18.5 kW	30 kW	37 kW	
			660...690 V	11 kW	15 kW	18.5 kW	30 kW	30 kW	
	1-phase	110 V	2.2 kW	2.5 kW	3 kW	3.7 kW	5.5 kW		
		2-pole	220...240 V	4 kW	5.5 kW	6 kW	7.5 kW	11 kW	
			380...440 V	5.5 kW	7.5 kW	11 kW	13 kW	18.5 kW	
	~ AC-23A	3-phase	220...240 V	7.5 kW	11 kW	15 kW	30 kW	37 kW	
		3-pole	380...440 V	15 kW	22 kW	30 kW	45 kW	75 kW	
			660...690 V	15 kW	22 kW	40 kW	45 kW	55 kW	
	1-phase	110 V	2.2 kW	2.5 kW	4 kW	5.5 kW	11 kW		
		2-pole	220...240 V	4 kW	5.5 kW	10 kW	15 kW	22 kW	
			380...440 V	7.5 kW	11 kW	18.5 kW	22 kW	37 kW	
	~ AC-21A			32 A	40 A	63 A	100 A	150 A	
Rated conditional short-circuit current		Power: kA	5	5	10	15	25		
Short-circuit protection		Cartridge fuse type gG, A	50	63	80	125	200		
Rated impulse withstand voltage		U imp = 6 kV conforming to EN/IEC 60947-1							
Contact operation		Slow break with positive opening operation							
Connection		Captive screw clamp terminals (For 2 x 2.8 x 0.8 mm push-on connectors, please consult your Regional Sales office)							
	Solid cable		2 x 6 mm ²	2 x 10 mm ²	2 x 16 mm ²	1 x 35 mm ²	1 x 70 mm ²		
	Flexible cable with or without cable end		2 x 4 mm ²	2 x 6 mm ²	2 x 10 mm ²	1 x 25 mm ²	1 x 50 mm ²		
	Tightening torque		1.2 N.m	2 N.m	2.5 N.m	2.5 N.m	2.5 N.m		
Switching capacity ---	Number of contacts in series	1	2	3					
	Resistive load V T ≤ 1 ms	24	48	70	32 A	50 A	63 A	115 A	—
		48	95	140	32 A	40 A	50 A	—	150 A
		60	120	180	12 A	12 A	16 A	—	—
		110	220	330	2 A	—	—	—	—
		220	440	660	0.6 A	—	—	—	—
		440	660	—	0.3 A	—	—	—	—
	Inductive load V T = 50 ms	24	48	70	32 A	40 A	63 A	100 A	150 A
		30	60	90	13 A	16 A	22 A	—	50 A
		48	95	140	3.2 A	3.6 A	5 A	—	—
		60	120	180	1.6 A	2 A	—	—	—
		110	220	330	0.5 A	0.55 A	—	—	—

Cam switches

Complete switches, 32 to 150 A
With 64 x 64 mm front plate (32 to 63 A ratings)
and 88 x 88 mm front plate (115 and 150 A ratings)



K30 C003AP



K50 C003AP

Switches with 60° switching angle					
Front mounting					
Wiring diagram and switching programme	Marking and switch position	Number of poles	Thermal current (Ith)	Reference	Weight
			A		kg
<div><div><div>Input 1</div><div>L1L2L3N</div><div>123456789101112</div><div>Output 1</div><div>U V W N</div></div><div><div>Input 2</div><div>L1L2</div><div>123456789101112</div><div>Output 2</div><div>U V</div></div></div> <div><div>1-pole</div><div>2-pole</div><div>3-pole</div><div>4-pole</div><div>6-pole</div></div> <div><div>0</div><div>60</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div><div>6</div><div>7</div><div>8</div><div>9</div><div>10</div><div>11</div><div>12</div></div>	<div><div><div>0</div><div>1</div></div><div><div>0</div><div>60</div></div></div>	1	32	<u>K30 A001AP</u>	0.130
		50	<u>K50 A001AP</u>	0.175	
		2	32	<u>K30 B002AP</u>	0.170
		50	<u>K50 B002AP</u>	0.215	
		3	32	<u>K30 C003AP</u>	0.224
		50	<u>K50 C003AP</u>	0.275	
		63	<u>K63 C003AP</u>	0.345	
		115	<u>K115 C003AP</u>	0.680	
		150	<u>K150 C003AP</u>	0.790	
		4	32	<u>K30 D004AP</u>	0.250
		50	<u>K50 D004AP</u>	0.305	
		63	<u>K63 D004AP</u>	0.390	
		115	<u>K115 D004AP</u>	0.745	
		150	<u>K150 D004AP</u>	0.880	
		6	32	<u>K30 F006AP</u>	0.425
		50	<u>K50 F006AP</u>	0.530	
		63	<u>K63 F006AP</u>	0.590	

0

1

0

60

Cam switches

Complete switches, 32 to 150 A

With 64 x 64 mm front plate (32 to 63 A ratings)
and 88 x 88 mm front plate (115 and 150 A ratings)

K63 C003HP



K150 D004HP

Switches with 90° switching angle

Front mounting


Wiring diagram and switching programme	Marking and switch position	Number of poles	Thermal current (Ith) A	Reference	Weight kg
		3	32	K30 C003HP	0.224
			50	K50 C003HP	0.275
			63	K63 C003HP	0.345
			115	K115 C003HP	0.680
			150	K150 C003HP	0.790
		4	32	K30 D004HP	0.250
			50	K50 D004HP	0.305
			63	K63 D004HP	0.390
			115	K115 D004HP	0.745
			150	K150 D004HP	0.880

Rear mounting

		3	32	K30 C503HP	0.250
			50	K50 C503HP	0.300
			63	K63 C503HP	0.370
			115	K115 C503HP	0.720
			150	K150 C503HP	0.830
		4	32	K30 D504HP	0.280
			50	K50 D504HP	0.350
			63	K63 D504HP	0.440
			115	K115 D504HP	0.790
			150	K150 D504HP	0.930

Cam switches

Complete switches, 32 to 150 A
With 64 x 64 mm front plate (32 to 63 A ratings)
and 88 x 88 mm front plate (115 and 150 A ratings)

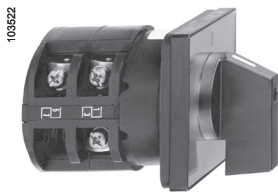

K50 B001UP

3

Changeover switches with “0” position

Front mounting													
Wiring diagram and switching programme	Marking and switch position	Number of poles	Thermal current (Ith)	Reference	Weight								
			A		kg								
 <table><tr><td>1-pole</td><td></td></tr><tr><td>2-pole</td><td></td></tr><tr><td>3-pole</td><td></td></tr><tr><td>4-pole</td><td></td></tr></table>	1-pole		2-pole		3-pole		4-pole			1	32	K30 B001UP	0.170
	1-pole												
	2-pole												
	3-pole												
	4-pole												
		50	K50 B001UP	0.215									
		150	K150 B001UP	0.790									
	2	32	K30 D002UP	0.250									
		50	K50 D002UP	0.305									
	3	32	K30 F003UP	0.425									
		50	K50 F003UP	0.530									
		63	K63 F003UP	0.590									
		115	K115 F003UP	0.645									
		150	K150 F003UP	0.760									
	4	32	K30 H004UP	0.485									
		50	K50 H004UP	0.610									
	63	K63 H004UP	0.680										
	115	K115 H004UP	0.750										
	150	K150 H004UP	0.880										

Changeover switches without “0” position

Front mounting					
 		3	32	K30 F013UP	0.425
			50	K50 F013UP	0.530
			63	K63 F013UP	0.590
			115	K115 F013UP	0.645
			150	K150 F013UP	0.760
		4	32	K30 H014UP	0.485
			50	K50 H014UP	0.610
			63	K63 H014UP	0.680
			115	K115 H014UP	0.750
			150	K150 H014UP	0.880




K63 F013UP

Cam switches

Complete switches, 32 to 150 A

With 64 x 64 mm front plate (32 to 63 A ratings)
and 88 x 88 mm front plate (115 and 150 A ratings)

103522

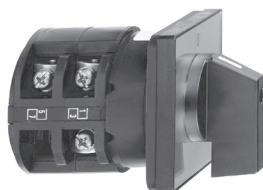

K50 H001YP

Star-delta switches

Front mounting

Wiring diagram and switching programme	Marking and switch position	Number of poles	Thermal current (Ith) A	Reference	Weight kg
		3	32	K30 H001YP	0.485
			50	K50 H001YP	0.610
			63	K63 H001YP	0.680
			115	K115 H001YP	0.750
			150	K150 H001YP	0.880

501177



K115 K006YP


Reversing star-delta switches

Front mounting

Wiring diagram and switching programme	Marking and switch position	Number of poles	Thermal current (Ith) A	Reference	Weight kg
		3	32	K30 K006YP	0.560
			50	K50 K006YP	0.690
			63	K63 K006YP	0.770
			115	K115 K006YP	0.880
			150	K150 K006YP	0.990

Cam switches

Complete switches, 32 to 150 A
With 64 x 64 mm front plate (32 to 63 A ratings)
and 88 x 88 mm front plate (115 and 150 A ratings)
Accessories

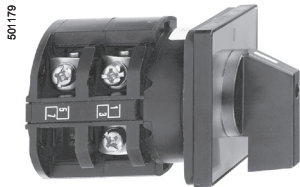

K63 H004PP

Pole change switches for 2-speed motors (for motors with tapped "Dahlander" windings)						
Front mounting						
Wiring diagram and switching programme	Marking and switch position	Number of poles	Thermal current A	Reference	Weight kg	
		3	32	K30 H004PP	0.485	
			50	K50 H004PP	0.610	
			63	K63 H004PP	0.680	



K150 D002WP

Reversing switches with "0" position						
Front mounting						
		2	32	K30 D002WP	0.250	
			50	K50 D002WP	0.305	
			63	K63 D002WP	0.390	
			115	K115 D002WP	0.745	
			150	K150 D002WP	0.880	
		3	32	K30 E003WP	0.385	
			50	K50 E003WP	0.485	
			63	K63 E003WP	0.540	
			115	K115 E003WP	0.590	
			150	K150 E003WP	0.710	

Accessories				
Description	For use with	Sold in lots of	Unit reference	Weight kg
Legend holders With blank legend	Square heads 64 x 64 mm	5	KZN 15	0.020
	Square heads 88 x 88 mm	5	KZN 103	0.040
Replacement blank legends for legend holder	KZN 15	5	KZ 77N	0.025
	KZN 103	5	KZ 100N	0.040
Blank legends for metallic finish front plate	64 x 64	5	KZN 21	0.035
	88 x 88	5	KZN 24	0.045


Cam switches

Complete switches, 32 to 150 A



With 64 x 64 mm front plate (32 to 63 A ratings)
and 88 x 88 mm front plate (115 and 150 A ratings)

Cam switches from 32 to 150 A

Front mounting

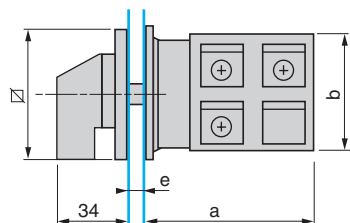


Rear mounting

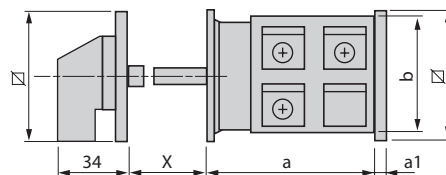

	K30 A K30 B	K30 C K30 D	K30 E K30 F	K30 H	K30 K	K50 A K50 B	K50 C K50 D	K50 E K50 F	K50 H	K50 K	K63 A K63 B	K63 C K63 D	K63 E K63 F	K63 H	K63 K
a	41	53.7	66.4	79.1	104.5	45.8	63.3	80.8	98.3	133.3	49.8	71.3	92.8	114.3	157.3
a1	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
b	58	58	58	58	58	60	60	60	60	60	66	66	66	66	66
□	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64
D1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	5.4	5.4	5.4	5.4	5.4
G1	—	48	—	—	—	—	48	—	—	—	—	48	—	—	—
X	—	78 to 97	—	—	—	—	78 to 97	—	—	—	—	78 to 97	—	—	—
	K115 A K115 B	K115 C K115 D	K115 E K115 F	K115 H	K115 K	K150 A K150 B	K150 C K150 D	K150 E K150 F	K150 H	K150 K					
a	61.5	88	114.5	141	194	67.5	100	132.5	165	230					
a1	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9					
b	84	84	84	84	84	88	88	88	88	88					
□	88	88	88	88	88	88	88	88	88	88					
D1	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4					
G1	—	68	—	—	—	—	68	—	—	—					
X	—	120 to 150	—	—	—	—	120 to 150	—	—	—					

e: support panel thickness 0.5 to 5.5 mm.


Panel cut-out



	K30/K50/K63	K115/K150
D2	4.5	6
D3	10	13
G2	48	68

Convention used for switching programme representation

Link positions (factory mounted)



Graphic representation of switching positions and spring return to "0" position



Angular position of switch

